
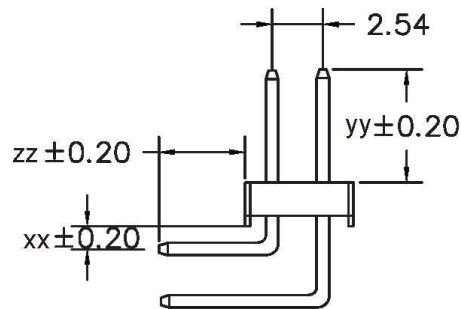


RECOMMENDED P.C.B LAYOUT

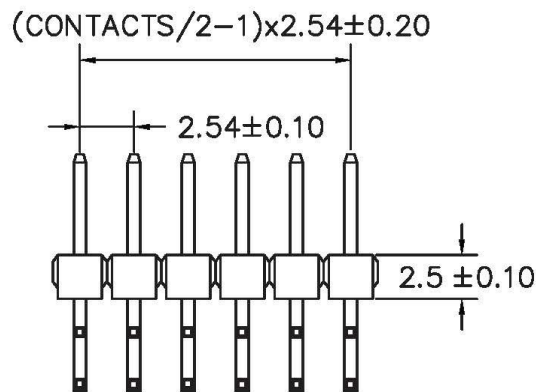

MATERIAL

HOUSING : THERMOPLASTIC UL94V-0

CONTACT : COPPER ALLOYS

SPECIFICATION

CURRENT: 3A

OPERATING TEMPERATURE: -55°C TO +105°C

CONTACT RESISTANCE : 20 MILLIOHMS MAX

INSULATION RESISTANCE : 1000 MEGAOHMS MIN

WITHSTANDING VOLTAGE : AC 1000V RMS

| | |
|----------|------|
| CONTACTS | 2X21 |
| 2X2 | 2X22 |
| 2X3 | 2X23 |
| 2X4 | 2X24 |
| 2X5 | 2X25 |
| 2X6 | 2X26 |
| 2X7 | 2X27 |
| 2X8 | 2X28 |
| 2X9 | 2X29 |
| 2X10 | 2X30 |
| 2X11 | 2X31 |
| 2X12 | 2X32 |
| 2X13 | 2X33 |
| 2X14 | 2X34 |
| 2X15 | 2X35 |
| 2X16 | 2X36 |
| 2X17 | 2X37 |
| 2X18 | 2X38 |
| 2X19 | 2X39 |
| 2X20 | 2X40 |

RoHS Compliant

All Connectors

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm

SCALE 1 : 1


DATE

SIZE A4


PROJECTION

TOLERANCES ARE

X ±
.X ± 0.38
.XX ± 0.25
.XXX ±
ANG ±



ORDER INFORMATION

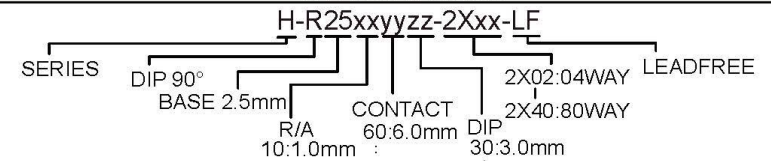

DESCRIPTION:

www.allconnectors.de

info@allconnectors.de

Tel.: 0049 711 7009503

Fax: 0049 711 7009504

70794 Filderstadt - Germany

Kettenerstr. 25