


Recommended P.C.Board
Hole Layout




Specifications

Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Copper Alloy
 Insulation Material: Polyester, UL 94V-0
 P.B.T

All materials must be GP materials

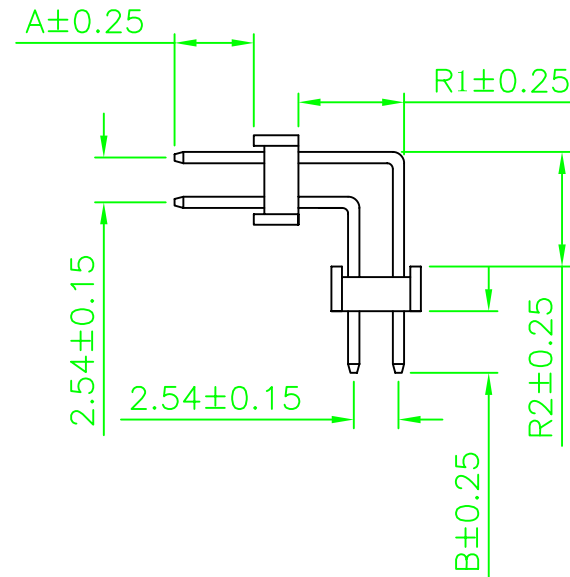

Ordering Information

HMNDRH - XX XX XXX P B

No. of Pins Per Row: 02-40
 Standard Plating: 01=Gold Flash, 02=Gold 3U", 11=Tin, XX=Select Plating
 Pin Length: 001=6, 0/9, 0/9, 0/3, 0
 XXX=Select A/R1/R2/B
 Material: L=LCP, B=Brass, P=Phosphoric Bronze
 Material: B=Brass, P=Phosphoric Bronze

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN DATE	 www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
X. ±	X' ±5°	Andy2005.08.12		
.X ±0.38	.X' ±2°	CHECK DATE	FILE NAME (品名)	2.54MM Header R/A TYPE
.XX ±0.25	.XX' ±1°	APPRO. DATE	PART NO (料号)	HMNDRH-XXXXXXXXPB
.XXX ±0.13	.XXX' ±0.5°		DRAWING NO.(图号)	HMNDRH-01
UNIT:mm	SCALE 1:1			REV.A0
A4	SHEET: 1 of 1			