

Specifications


Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass
 Insulation Material: Polyester, UL 94V-0
 P.B.T
 All materials must be GP materials

Dim	NOTE
5.00mm	03~08pins
8.05mm	09~40pins

Recommended P.C.Board Hole Layout

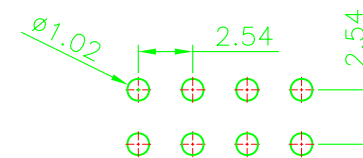

Ordering Information

HMIDSH - XX XX XXX P B

No. of Pins Per Row: 02-40
 Standard Plating: 01=Gold Flash, 02=Gold 3U", 11=Tin, XX=Select Plating
 Pin Length: 001=6.0/9.0/3.0, XXX=Select A/H/B
 Material: L=LCP, T=NLBT, P=PBT
 Material: B=Brass, P=Phosphoric Bronze

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN	DATE	All Connectors	
X. ±0.38	X' ±5°	Andy2005.08.12		www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
.XX ±0.25	.X' ±2°	CHECK	DATE	FILE NAME (品名)	2.54MM Header DIP TYPE
.XXX ±0.13	.XX' ±1°	APPRO.	DATE	PART NO (料号)	HMNDSH-XXXXXXXXPB
UNIT:mm	SCALE 1:1			DRAWING NO.(图号)	HMNDSH-01
A4	SHEET: 1 of 1				REV.A0