


Recommended P.C.Board Layout

(Tolerance:±0.05)




Specifications


- Current Rating: 3Amp
- Insulation Resistance: 1000MΩ Min.
- Dielectric Withstanding: 600V AC/DC
- Contact Resistance: 20mΩ Max.
- Operating Temperature: -40°C to +105°C

Materials

- Contact Material: Brass
- Insulation Material: Polyester, UL 94V-0 Nylon 6T
- All materials must be GP materials

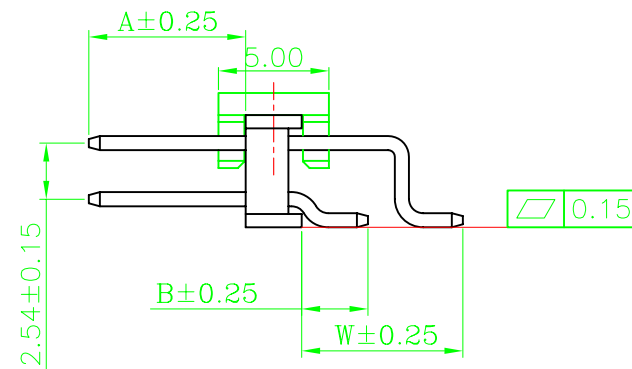

Ordering Information

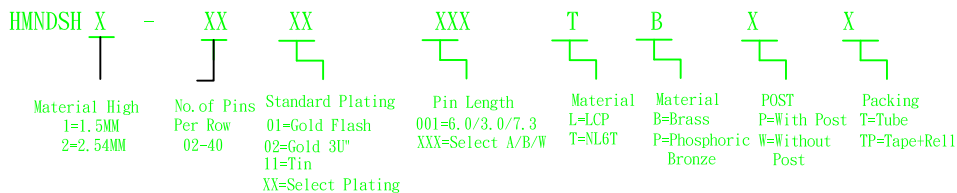

GENERAL TOLERANCE .X ± 0.38 .XX ± 0.25 .XXX ± 0.13	ANGLE TOLERANCE .X° ± 5° .X° ± 2° .XX° ± 1° .XXX° ± 0.5°	DESIGN DATE Andy2005. 08. 12	 www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
		CHECK DATE		
UNIT:mm	SCALE 1:1	APPRO. DATE	FILE NAME (品名)	2.54MM Header SMT TYPE
A4	SHEET: 1 of 1		PART NO (料号)	HMNSHX-XXXXXXXXLB
			DRAWING NO.(图号)	HMNSHX-01
				REV.A0