


Specifications

Current Rating: 3Amp
 Insulation Resistance: 1000M Ω Min.
 Dielectric Withstanding: 600VAC
 Contact Resistance: 20m Ω Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Copper alloy
 Insulator Material: Polyester UL 94V-0
 NYLON-6T
 All materials must be GP materials

Recommended P.C.Board Hole Layout

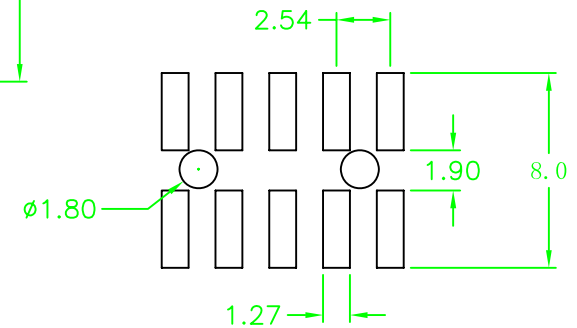

Ordering Information

HMNDSVH - XX XX XXX T B

No. of Pins Per Row: 02-40
 Standard Plating: 01=Gold Flash, 02=Gold 3U", 11=Tin, XX=Select Plating
 Pin Length: 001=4.0/7.0/6.5, XXX=Select A/H/B
 Material: L=LCP, T=NL6T
 Material: B=Brass, P=Phosphoric Bronze

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN	DATE
X. ± 0.38 .X ± 0.25 .XX ± 0.13	X' $\pm 5^\circ$.X' $\pm 2^\circ$.XX' $\pm 1^\circ$.XXX' $\pm 0.5^\circ$	Andy2005.08.12	
UNIT:mm	SCALE 1:1	CHECK	DATE
A4	SHEET: 1 of 1	APPRO.	DATE

All Connectors	
www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
FILE NAME (品名)	2.54MM Header SMT TYPE
PART NO (料号)	HMNDSVH-XXXXXXXXTB
DRAWING NO.(图号)	HMNDSVH-01
	REV.A0