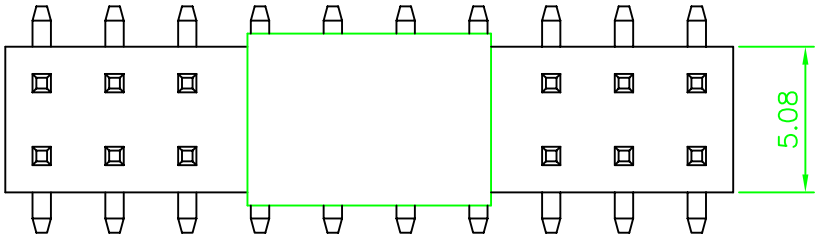

Dim.D	NOTE
5.00mm	03~08PIN
8.50mm	09~40PIN

Specifications

Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600V AC
Contact Resistance: 20mΩ Max.
Operating Temperature:-40°C to +105°C

Materials

Contact Material: Brass
Insulator Material:Polyester, UL94V-0
Nylon 6T
All materials must meet Greenconn requirement for environment protection

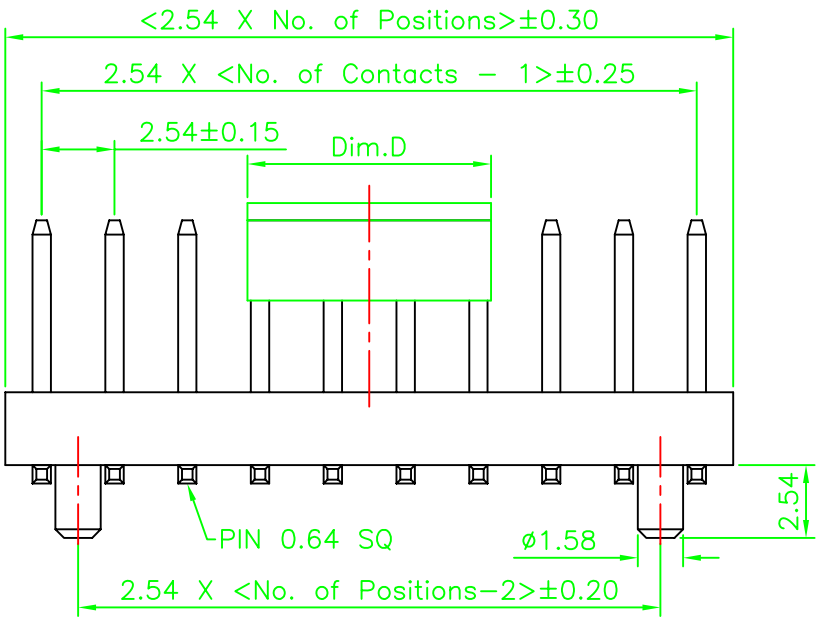

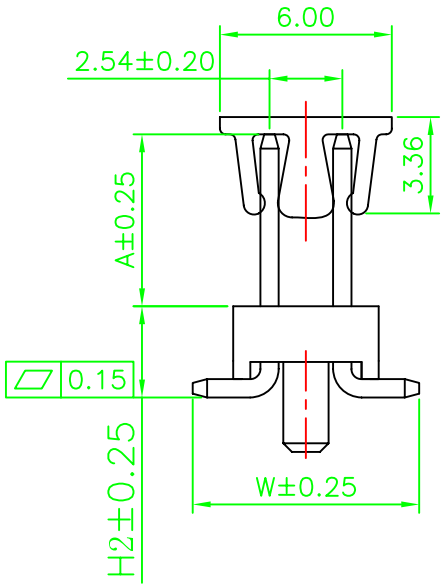

Recommended P.C.B.Layout

(Tolerance:±0.05)

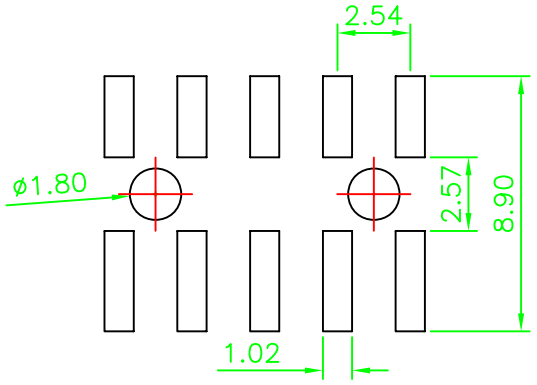

Ordering Information

HMNDSV X - XX XX XXX T B X X

X	XX	XX	XXX	T	B	X	X
Material High 1=1.5MM 2=2.54MM 3=4.3MM 4=7.4MM	No.of Pins Per Row 02-40	Standard Plating 01=Gold Flash 02=Gold 3U" 11=Tin XX=Select Plating	Pin Length 001=6.0/4.5/7.5 XXX=Select A/H2/W	Material L=LCP T=NL6T	Material B=Brass P=Phosphoric Bronze	POST P=With Post W=Without Post	Packing T=Tube TP=Tape+Rell

GENERAL TOLERANCE		ANGLE TOLERANCE	
X.	±	X°	±5°
.X	±0.38	.X°	±2°
.XX	±0.25	.XX°	±1°
.XXX	±0.13	.XXX°	±0.5°
UNIT:mm		SCALE	1:1
A4		SHEET: 1 of 1	

DESIGN	DATE
Andy	2005. 08. 12
CHECK	DATE
APPRO.	DATE

All Connectors
www.allconnectors.eu | info@allconnectors.eu
Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

FILE NAME (品名)	2.54MM Header SMT TYPE
PART NO (料号)	HMNDSVX-XXXXXXXTB
DRAWING NO.(图号)	HMNDSVX-01 REV.A0