


Specifications
 Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Recommended P.C.Board

Hole Layout
 (Tolerance: ± 0.05)

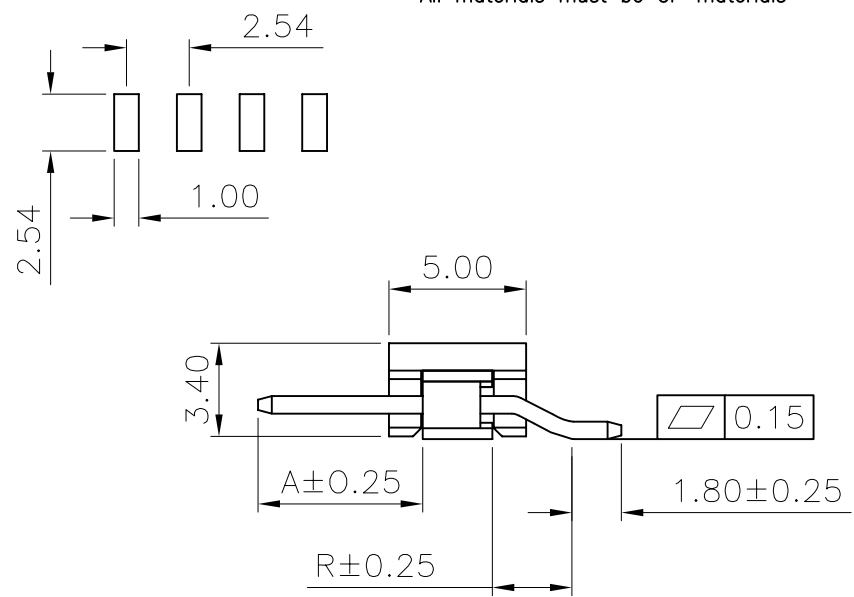

Materials
 Contact Material: Brass
 Insulation Material: Polyester, UL 94V-0
 Nylon 6T (Processing temp. 260°C, 10sec)
 All materials must be GP materials

Ordering Information

HMNSSHX - XX XX XXX T B X X

Material High 1=1.5MM 2=2.54MM	No. of Pins Per Row 03-40	Standard Plating 01=Gold Flash 02=Gold 3U" 11=Fin XX=Select Plating	Pin Length 001=A=6.0/2.8 XXX=Select A/R	Material L=LCP T=NL6T	Material B=Brass P=Phosphoric Bronze	Post P=With Post W=Without Post	Packing TR=Tape+Rel T=Tube
--------------------------------------	---------------------------------	---	---	-----------------------------	---	---------------------------------------	----------------------------------

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN DATE	 www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
X. ± 0.38 .XX ± 0.25 .XXX ± 0.13	X'. $\pm 5^\circ$.X' $\pm 2^\circ$.XX' $\pm 1^\circ$.XXX' $\pm 0.5^\circ$	Andy2005.08.12		
UNIT:mm	SCALE 1:1	CHECK DATE	FILE NAME (品名)	2.54MM Header SMT TYPE
A4	SHEET: 1 of 1	APPRO. DATE	PART NO (料号)	HMNSSHX-XXXXXXLBX
			DRAWING NO.(图号)	HMNSSHX-05 REV.A0