

Specifications


Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC/DC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Brass
 Insulator Material: Polyester, UL94V-0
 Nylon 6T

All materials must be GP materials

Recommended P.C.Board Layout

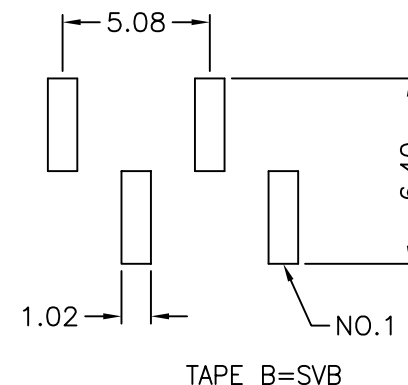

Ordering Information

HMNSSVXH	-	XX	XX	XXX	T	B	X
No. of Pins Per Row		Standard Plating	Pin Length	Material	Material		Packing
03-40		01=Gold Flash 02=Gold 3U" 11=Pin XX=Select Plating	001=6, 0/3, 0/5, 3	L=LCP T=NL6T	B=Brass P=Phosphoric Bronze		TR=Tape+Re11 T=Tube

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN	DATE	 www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25		
X. ± .X ±0.38 .XX ±0.25 .XXX ±0.13	X°. ±5° .X° ±2° .XX° ±1° .XXX° ±0.5°	Andy2005.08.12				FILE NAME (品名)
UNIT:mm	SCALE 1:1	CHECK	DATE	PART NO (料号)	HMNSSVXH-XXXXXXXXTBX	
A4	SHEET: 1 of 1	APPRO.	DATE	DRAWING NO.(图号)	HMNSSVXH-05	REV.AO