

**Specifications**


Current Rating: 3Amp  
 Insulation Resistance: 1000MΩ Min.  
 Dielectric Withstanding: 600V AC  
 Contact Resistance: 20mΩ Max.  
 Operating Temperature: -40°C to +105°C

**Materials**

Contact Material: Copper Alloy  
 Insulation Material: Polyester, UL 94V-0  
 P.B.T

All materials must be GP materials

Recommended P.C.Board  
 Hole Layout

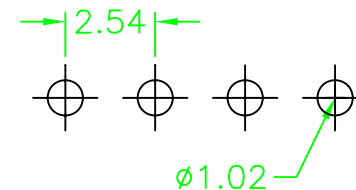

**Ordering Information**

HMNSS X - XX XX XXX P B  
 Material High 1=1.5MM 2=2.54MM  
 No. of Pins Per Row 02-40  
 Standard Plating 01=Gold Flash 02=Gold 3U" 11=Tin XX=Select Plating  
 Pin Length 001=6.0 /3.0 XXX=Select A/B  
 Material L=LCP T=NL6T P=PBT  
 Material B=Brass P=Phosphoric Bronze

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN DATE	 www.allconnectors.eu   info@allconnectors.eu Tel. +49 (0)711 / 358 110 20   Fax +49 (0)711 / 358 110 25	
X. ± .X .XX ±0.25 .XXX ±0.13	X' ±5' .X' ±2' .XX' ±1' .XXX' ±0.5'	Andy2005.08.12		
UNIT:mm	SCALE 1:1	APPRO. DATE	FILE NAME (品名)	2.54MM Header Dip TYPE
A4	SHEET: 1 of 1		PART NO (料号)	HMNSSX-XXXXXXXXPB
			DRAWING NO.(图号)	HMNSSX-01
				REV.A0