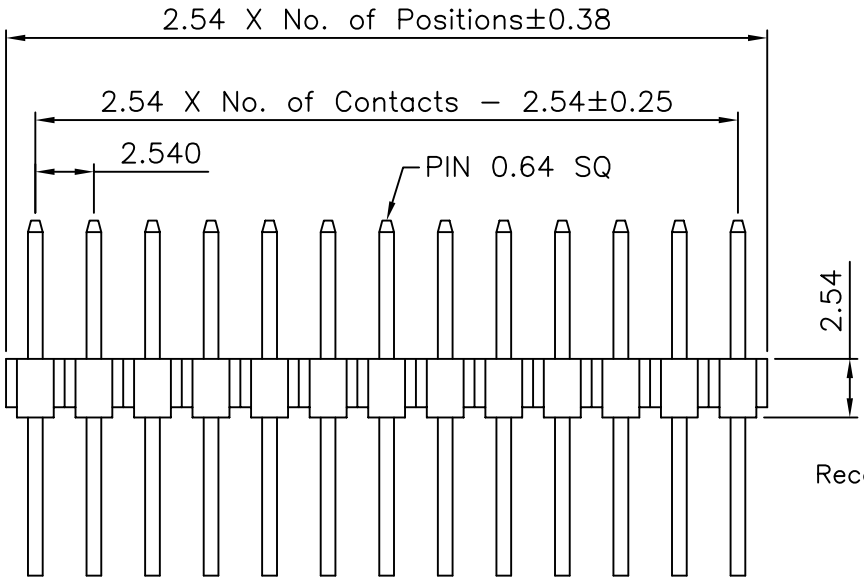

Specifications

Current Rating: 3Amp
Insulation Resistance: 1000MΩ Min.
Dielectric Withstanding: 600V AC/DC
Contact Resistance: 20mΩ Max.
Operating Temperature:–40°C to +105°C

Materials

Contact Material: Copper Alloy
Insulation Material: Polyester, UL 94V–0
P.B.T
All materials must be GP materials

Recommended P.C.Board
Hole Layout

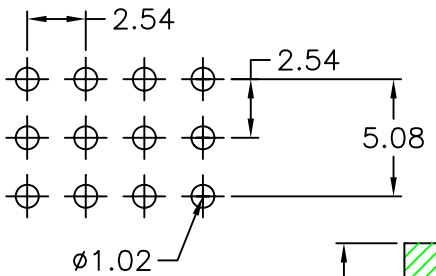

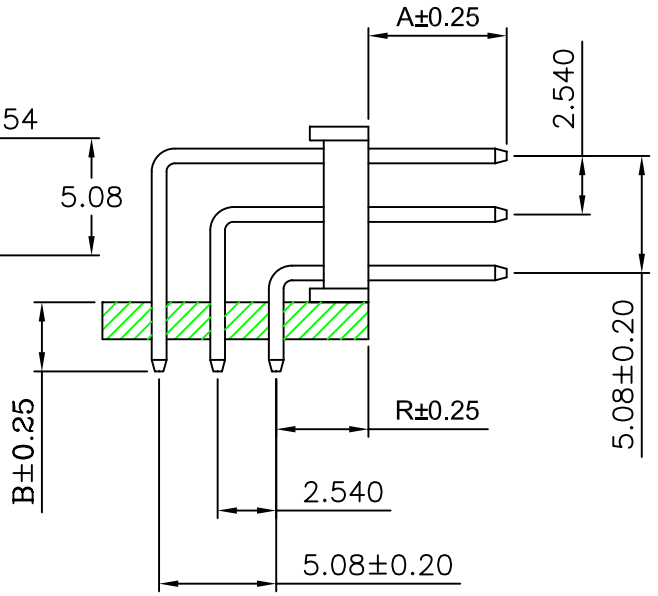

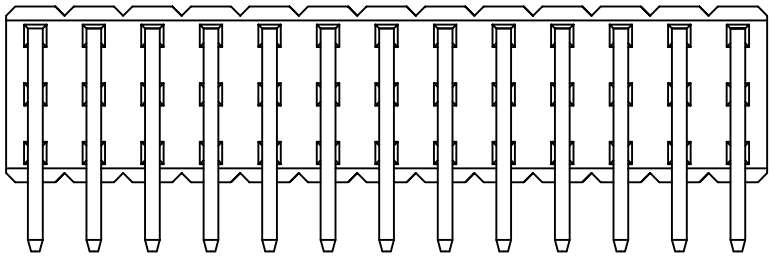

Ordering Information

HMNTR 2 – XX XX XXX P B

XX	XX	XXX	P	B
No. of Pins Per Row 02-40	Standard Plating 01=Gold Flash 02=Gold 3U" 11=Tin XX=Select Plating	Pin Length 001=6.0/4.0/3.0 XXX=Select A/R/B	Material L=LCP T=NL6T P=PBT	Material B=Brass P=Phosphoric Bronze

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN DATE	All Connectors
X. ±	X° ±5°	Andy2005. 08. 12	www.allconnectors.eu | info@allconnectors.eu
.X ±0.38	.X° ±2°	CHECK DATE	Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25
.XX ±0.25	.XX° ±1°		FILE NAME(品名): 2.54MM Header R/A TYPE
.XXX ±0.13	.XXX° ±0.5°		PART NO(料号): HMNTR2–XXXXXXXPB
UNIT:mm	SCALE 1:1	APPRO. DATE	DRAWING NO.(图号): HMNTR2–01 REV.A0
A4	SHEET: 1 of 1		