


Specifications

Current Rating: 3Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 600V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C

Materials

Contact Material: Copper Alloy
 Insulation Material: Polyester, UL 94V-0 P.B.T
 All materials must be GP materials

Recommended P.C.Board
 Hole Layout

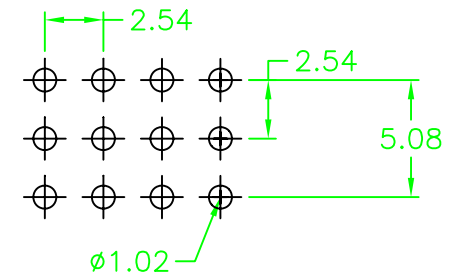

Ordering Information

HMNTS 2 - XX XX XXX P B

No. of Pins Per Row: 02-40
 Standard Plating: 01=Gold Flash, 02=Gold 3U", 11=Tin, XX=Select Plating
 Pin Length: 001=6.0 /3.0, XXX=Select A/B
 Material: L=LCP, T=NL6T, P=PBT
 Material: B=Brass, P=Phosphoric Bronze

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN DATE	 www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
.X ±0.38 .XX ±0.25 .XXX ±0.13	X' ±5° .X' ±2° .XX' ±1° .XXX' ±0.5°	Andy2005.08.12		
UNIT:mm	SCALE 1:1	CHECK DATE	FILE NAME (品名)	2.54MM Header Dip TYPE
A4	SHEET: 1 of 1	APPRO. DATE	PART NO (料号)	HMNTS2-XXXXXXXPB
			DRAWING NO.(图号)	HMNTS2-01
				REV.A0