

Recommended P.C.B Layout

**MATERIAL**

Insulator : 30% Glass fiber PBT  
 Contact Pin : Brass , Gold Flash

**SPECIFICATION**

Current Rate : 3 AMP  
 Insulation Resistance : 5000MΩMin. at DC 500V  
 Contact Resistance : 20mΩMax. at DC 100mA  
 Dielectric Voltage : AC 500V for one minute  
 Operation Temperature : -40°C to + 105°C

**All Connectors**


www.allconnectors.de  
 info@allconnectors.de  
 Tel: 0049 711 7003503  
 Fax: 0049 711 7003501  
 70/34 Hilderstr. Germany  
 Kettelerstr. 25

**RoHS Compliant**


DRAWING BY CY  
 CHECKED BY GENIUS  
 UNIT/mm SCALE 1:1  
 DATE  
 SIZE A4 PROJECTION

TOLERANCES ARE

X ±  
 .X ± 0.30  
 .XX ± 0.20  
 .XXX ±  
 ANG ±



**ORDER INFORMATION**

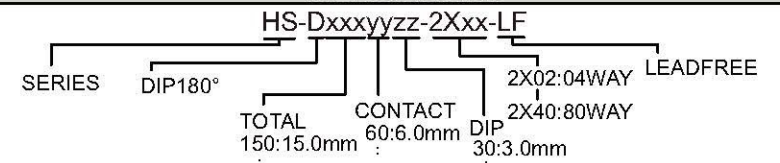

DESCRIPTION: