

Recommended P.C.B Layout

### MATERIAL

Insulator : 30% Glass fiber PBT

Contact Pin : Brass

### SPECIFICATION

Current Rate : 3 AMP

Insulation Resistance : 5000M $\Omega$ Min. at DC 500V

Contact Resistance : 20m $\Omega$ Max. at DC 100mA

Dielectric Voltage : AC 500V for one minute

Operation Temperature : -40°C to + 105°C

RoHS Compliant

**All Connectors**

www.allconnectors.de  
Tel.: 0049 711 3008608  
70774 Filzbergstr. - Germany

info@allconnectors.de  
Fax: 0049 711 3008604  
Kellernstr. 25

DRAWING BY CY

CHECKED BY GENIUS

UNIT / mm SCALE 1 : 1

DATE

SIZE A4 PROJECTION

TOLERANCES ARE

X  $\pm$

.X  $\pm$  0.30


.XX  $\pm$  0.20

.XXX  $\pm$

ANG  $\pm$



### ORDER INFORMATION

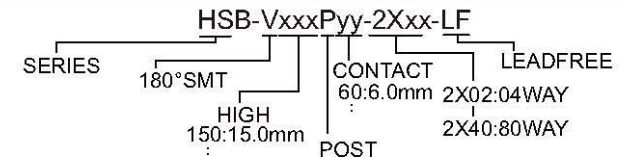

DESCRIPTION: PIN HEADER 2.54\*2.54mm STRAIGHT STACK