

Recommended P.C.B Layout

MATERIAL

Insulator : 30% Glass fiber PBT
Contact Pin : Brass

SPECIFICATION

Current Rate : 3 AMP
Insulation Resistance : 5000MΩMin. at DC 500V
Contact Resistance : 20mΩMax. at DC 100mA
Dielectric Voltage : AC 500V for one minute
Operation Temperature : -40°C to + 105°C


RoHS Compliant

All Connectors


www.allconnectors.de
Tel.: 0049 711 7009903
70794 Filzelsdorf - Germany

info@allconnectors.de
Fax: 0049 711 7009904
Kellernstr. 25

DRAWING BY CY		TOLERANCES ARE X ± 0.30 .X ± 0.20 .XXX ± ANG ±
CHECKED BY GENIUS		
UNIT / mm	SCALE 1 : 1	
DATE		
SIZE A4	PPOJECTION	



ORDER INFORMATION

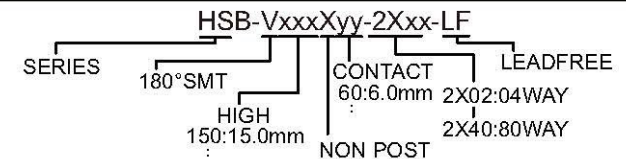

DESCRIPTION: PIN HEADER 2.54*2.54mm STRAIGHT STACK