

Connector

Pin Header Series

KLS1-207 PIN HEADER 2.54mm(0.100") Right Pin Type

Electrical Characteristics:







Current Rating: 1 AMP
 Insulator Resistance: 5000MΩmin. at DC 500V
 Contact Resistance: 20mΩmax. at DC 100mA
 Operating Temperature: -45°C~+105°C

Material:


Housing: 30% Glass filled PBT UL94V-0
 Contacts: Brass
 Plating: Selective gold plated : gold plated on mating area and nickel plated on wire Cutting area
 Gold plated: 0.8u" over 50u" nickel
 Tin plated: 100u" over 50u" nickel

Features:



- * Available in straight and right angle.
- * Side-to-side and end-to-end stackable.
- * Custom design offered.

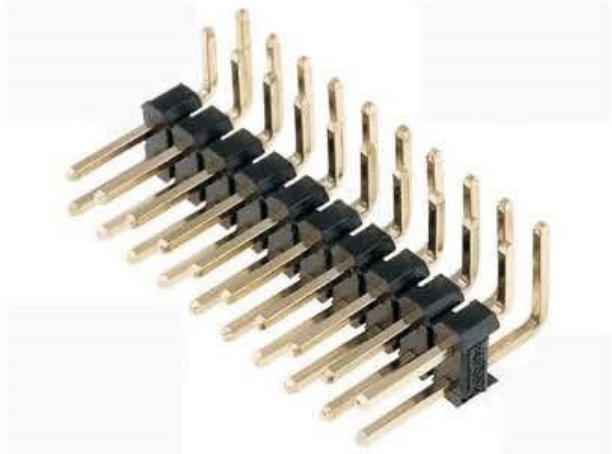


R1 TYPE




R2 TYPE



R1 TYPE



R2 TYPE



P. C. B Layout

Position	1 Thru 40
Dimension	2 Thru 80
A±0.20	2.54xN
B±0.15	2.54xN-2.54

ORDER INFORMATION

Product No.: KLS1-207-1-XX-R 1

Pos. No. _____ Right Pin Type
 2.54mm Pin Header Series _____ Tail Style: S=Straight Pin R=Right Pin T=SMT Pin
 1-Single layer 2-Double layer _____ Total pin number: XX=01-80Pin



www.allconnectors.de
 Tel.: 0049 711 7009503
 70794 Filderstadt - Germany

info@allconnectors.de
 Fax: 0049 711 7009504
 Kettnerstr. 25