

# Connector

## Pin Header Series

KLS1-207 PIN HEADER 2.54mm(0.100") Double layer SMT Pin Type

### Electrical Characteristics:





Current Rating: 1 AMP  
 Insulator Resistance: 5000MΩmin. at DC 500V  
 Contact Resistance: 20mΩmax. at DC 100mA  
 Operating Temperature: -45°C~+105°C

### Material:

Housing: 30% Glass filled PBT UL94V-0  
 Contacts: Brass  
 Plating: Selective gold plated : gold plated on mating area and nickel plated on wire Cutting area  
 Gold plated: 0.8u " over 50u " nickel  
 Tin plated: 100u " over 50u " nickel

### Features:

- \* Available in straight and right angle.
- \* Side-to-side and end-to-end stackable.
- \* Custom design offered.

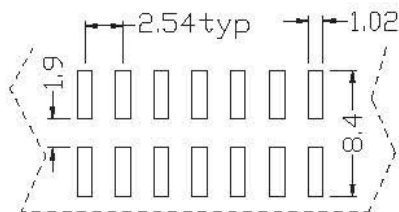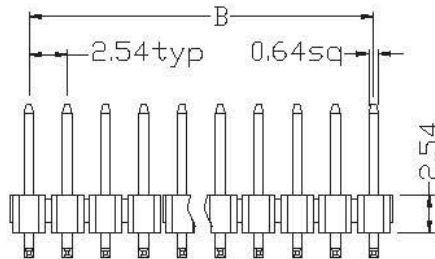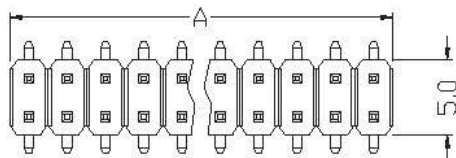


Position	1 Thru 40
Dimension	2 Thru 80
A±0.20	2.54xN
B±0.15	2.54xN-2.54

P.C.B Layout

## ORDER INFORMATION

Product No.: KLS1-207-2-XX-T



www.allconnectors.de  
 Tel.: 0049 711 7009503  
 70794 Filderstadt - Germany

info@allconnectors.de  
 Fax: 0049 711 7009504  
 Kettenerstr. 25