

SPECIFICATIONS

Material

Insulator : PBT, glass reinforced, rated UL 94V-0

Contact : Brass

Electrical



Current Rating : 1 Amp

Contact Resistance : 30 mΩ max.




Insulation Resistance : 3000 MΩ min.

Dielectric Withstanding Voltage : 500V AC for 1 minute

Operating Temperature : -40°C to +105°C

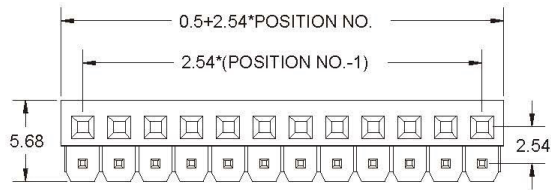

APPLICATION VIEW

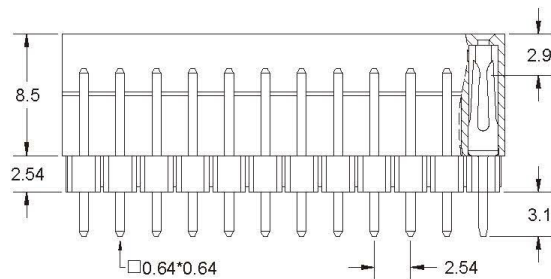

RECOMMENDED P.C.B LAYOUT

All Connectors

www.allconnectors.de info@allconnectors.de
Tel.: 0049 711 7009503 Fax: 0049 711 7009504
70794 Filderstadt - Germany Kettnerstr. 25

RoHS Compliant

TOLERANCES ARE

X ±
.X ±
.XX ±
.XXX ±
ANG ±


DRAWING BY CY

CHECKED BY GENIUS


UNIT/ mm SCALE 1:1

DATE

SIZE A4 PROJECTION



ORDER INFORMATION

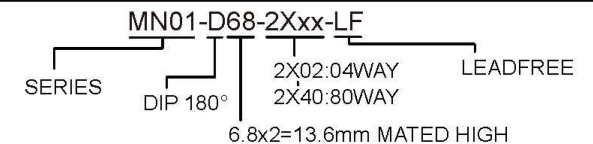

DESCRIPTION: