


Specifications
 Current Rating: 7.9Amp
 Insulation Resistance: 1000MΩ Min.
 Dielectric Withstanding: 1500V AC
 Contact Resistance: 20mΩ Max.
 Operating Temperature: -40°C to +105°C
 Materials
 Contact Material: Brass
 Insulation Material: Polyester UL 94V-0
 LCP
 All materials must meet Greenconn requirement for environment protection

Recommended P.C.Board Layout

(Tolerance: ±0.05)

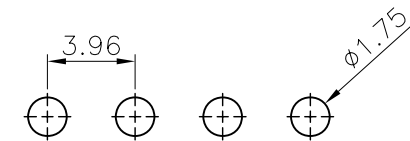

Ordering Information

HMPSS1 - XX XX XXX L B

No. of Pins Per Row: 02-24
 Standard Plating: 01=Gold Flash, 02=Gold 3U", 11=Tin, XX=Select Plating
 Pin Length: 001=11.0 / 3.5, XXX=Select A/B
 Material: L=LCP, T=NL6T
 Material: B=Brass, P=Phosphoric Bronze

GENERAL TOLERANCE	ANGLE TOLERANCE	DESIGN	DATE	 www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25	
		Andy2005.08.12			
X. ±	X°. ±5'	CHECK	DATE	FILE NAME (品名)	3.96MM Header Dip TYPE
.X ±0.38	.X' ±2'			PART NO (料号)	HMPSS1-XXXXXXXXLB
.XX ±0.25	.XX' ±1'	APPRO.	DATE	DRAWING NO.(图号)	HMPSS1-01
.XXX ±0.13	.XXX' ±0.5'				REV.A0
UNIT:mm	SCALE 1:1				
A4	SHEET: 1 of 1				