


Recommended P.C.B. Layout

(Tolerance:0.05mm)





Specifications

- Current Rating: 7.9Amp
- Insulation Resistance: 5000M Ω Min.
- Dielectric Withstanding: 1500V AC/DC
- Contact Resistance: 20m Ω Max.
- Operating Temperature: -55°C to +125°C

MATERIAL:

- HOUSING: LCP. FLAMMABILITY UL94-V0
OR OTHER HIGH LEVEL PLASTIC, COLOR:BLACK.
- Contact: Brass Δ

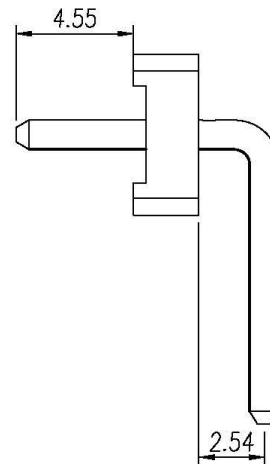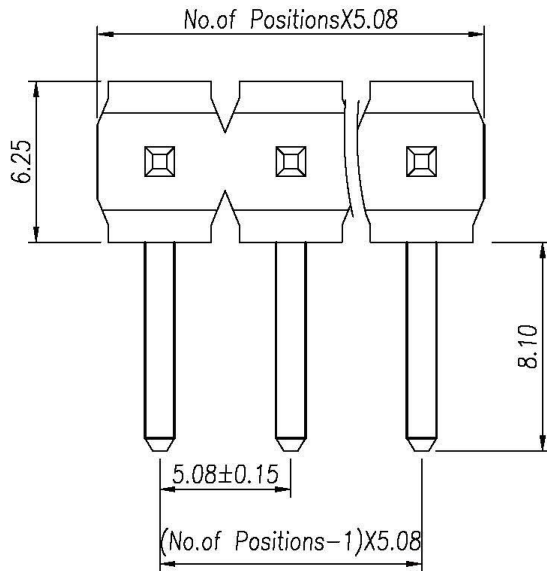

All Connectors


www.allconnectors.de info@allconnectors.de
Tel.: 0049 711 7009503 Fax: 0049 711 7009504
70794 Filderstadt - Germany Kettenerstr. 25

RoHS Compliant


DRAWING BY CY	
CHECKED BY GENIUS	
UNIT / mm	SCALE 1 : 1
DATE	
SIZE A4	PPOJECTION

TOLERANCES ARE

X. \pm
X \pm
.XX ± 0.20
.XXX ± 0.20
ANG \pm



ORDER INFORMATION

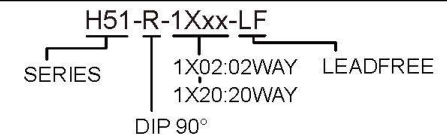

DESCRIPTION: 5.08 PIN HEADER SINGLE ROW R/A TYPE CONNECTOR