


SPECIFICATIONS


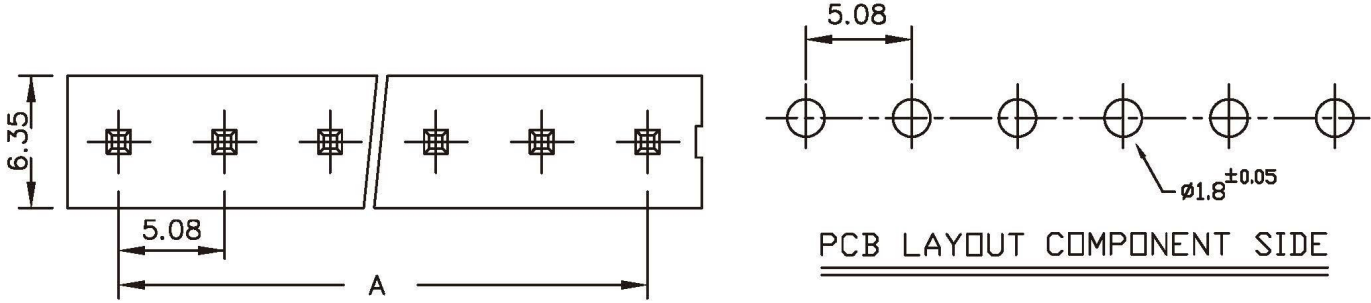


Electrical

Current Rating: 5A AC, DC
 Voltage Rating: 250V AC, DC
 Operating Temp.: -25°C ~ +85°C
 Insulation Resistance: 1000MΩ/ min.
 Dielectric Withstanding Voltage: 1500V AC/ min.
 Contact Resistance: 10mΩ/ max.

Material

Material: Nylon66, UL94V-2

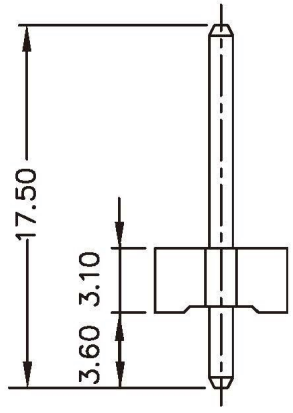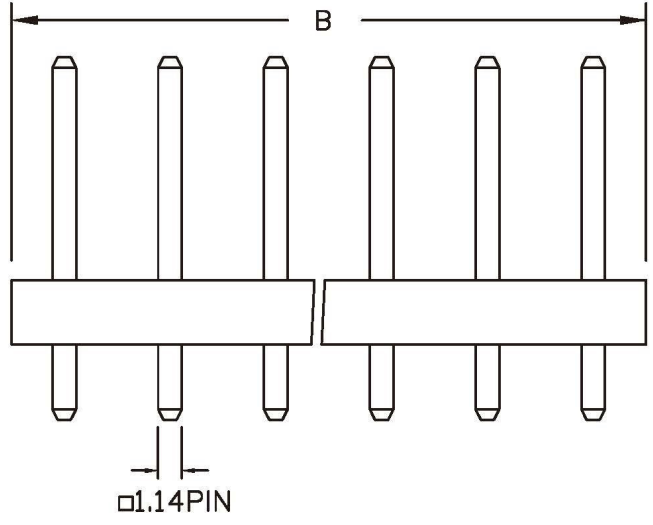

Poles	Dimension mm (in.)		Part No.
	A	B	
2	5.08	10.30	LKX-D-02
3	10.16	15.40	LKX-D-03
4	15.24	20.50	LKX-D-04
5	20.32	25.60	LKX-D-05
6	25.40	30.70	LKX-D-06
7	30.48	35.80	LKX-D-07
8	35.56	41.00	LKX-D-08
9	40.64	46.10	LKX-D-09
10	45.72	51.20	LKX-D-10
11	50.80	56.30	LKX-D-11
12	55.88	61.40	LKX-D-12

RoHS Compliant		TOLERANCES ARE			ORDER INFORMATION	
	DRAWING BY CY	X ± .X ± 0.50 .XX ± 0.30 .XXX ± ANG ±	LKX-D-xx-LF		LEADFREE	
	CHECKED BY GENIUS		SERIES DIP 180°			
UNIT/ mm	SCALE 1 : 1	02~12WAY				
DATE	PROJECTION		DESCRIPTION: 5.08mm Wire-to-Board Header Dip 180° Type			
SIZE A4						

www.allconnectors.de info@allconnectors.de
 Tel.: 0049 711 7009503 Fax: 0049 711 7009504
 70794 Filderstadt - Germany Kettenerstr. 25