
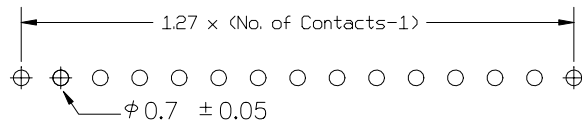

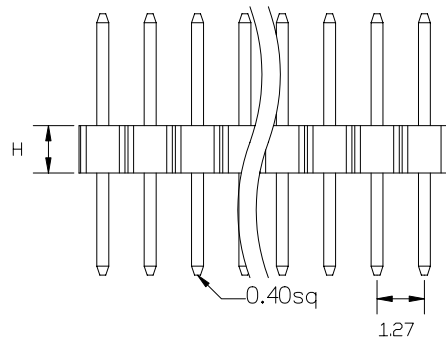


RoHS compliant

SPECIFICATION

Current Rating: 1 Amp
 Insulation Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms Max
 Dielectric Withstanding: AC 500 V
 Operating Temperature: -65 ° C to +125° C
 Contact Material: Brass
 Insulator Material: High Temperature Plastic
 UL94V-0

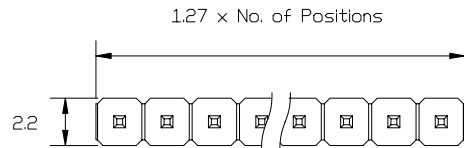


Recommended P.C.B Layout

Ordering Code:

CPD01- X - A - X - X - X - X

① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contact 01 TO 40
- ③ Connector Type
A: Single Row
- ④ Contact Plating
A: Gold Flash
E: 3u" Gold
B: 10u" Gold
C: 15u" Gold
- ⑤ Body Height
H1: 1.1mm
H2: 1.5mm
H3: 2.5mm
- ⑥ Pin Length
A/B/C Please mark the desired length in the A/B/C
- ⑦ Code Packing
0: Bag

UNLESS OTHERWISE SPECIFIED TOLERANCE		 <small>www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25</small>
ANG. 0. 0 ±0.25 .00 ±0.2		
SCALE: AS SHOWN	UNIT: mm	
DRAWN		TITLE: 1.27 mm Pin Header, Straight Type Single Row
CHECKED		
APPROVED		DRAWN NO: CPD01-XAXXX-1
REV		PRODUCT NO. CPD01-XAXXXX
DESCRIPTION		
DATE		

REV

DESCRIPTION

DATE

PRODUCT NO. CPD01-XAXXXX