




RoHS compliant

# SPECIFICATION


Current Rating: 1 Amp  
 Insulation Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms Max  
 Dielectric Withstanding: AC 500 V  
 Operating Temperature: -65 ° C to +125° C  
 Contact Material: Brass  
 Insulator Material: High Temperature Plastic  
 UL94V-0

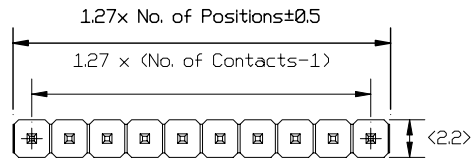

TYPE A

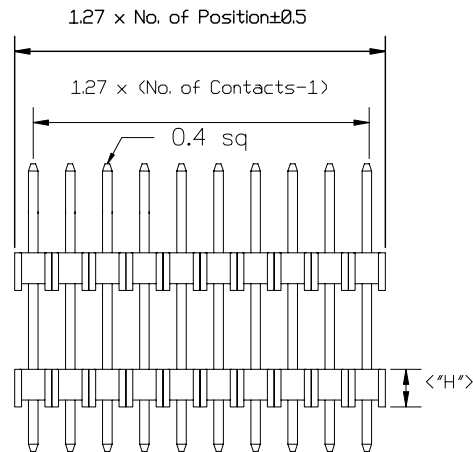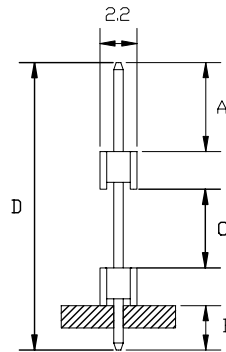

TYPE B



Ordering Code:

CPD02- X - X - A - X - X - X - X  
 ① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ① Series No:
- ② No. of Contact 01 TO 40
- ③ Contact Plating  
 A: Gold Flash  
 E: 3u" Gold  
 B: 10u" Gold  
 C: 15u" Gold
- ④ Row Type  
 A: Single Row
- ⑤ Body Height  
 H1: 1.1mm  
 H2: 1.5mm  
 H3: 2.5mm
- ⑥ Special Function  
 A: Type A  
 B: Type B
- ⑦ Pin Length  
 A/B/C Please mark the desired length in the A/B/C
- ⑧ Code Packing  
 0: Bag

UNLESS OTHERWISE SPECIFIED TOLERANCE		 www.allconnectors.eu   info@allconnectors.eu Tel. +49 (0)711 / 358 110 20   Fax +49 (0)711 / 358 110 25
ANG. 0. 0 ±0.25 .00 ±0.2		
SCALE: AS SHOWN	UNIT: mm	TITLE: 1.27 mm Pin Header, Straight Type Single Row DRAWN NO: CPD02-XXAXXX-1 PRODUCT NO. CPD02-XXAXXXX
DRAWN		
CHECKED		
APPROVED		
REV	DESCRIPTION	DATE