



RoHS compliant

SPECIFICATION



Current Rating: 1 Amp
 Insulation Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms Max
 Dielectric Withstanding: AC 500 V
 Operating Temperature: -65 ° C to +125° C
 Contact Material: Brass
 Insulator Material: Polyester, UL 94V-0
 Standard : PBT

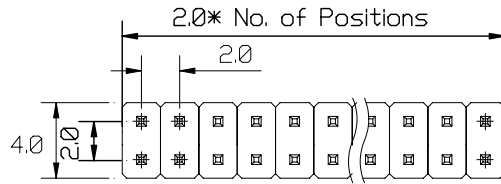


Ordering Code:

DPD01- X - X - A - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contact: 02 TO 80
- ③ Contact Plating:
 - A: Gold Flash
 - E: 3u" Gold
 - B: 10u" Gold
 - C: 15u" Gold
- ④ Connector Type:
 - B: Dual Row
- ⑤ Body Height:
 - H1: 1.5mm
 - H2: 2.0mm
- ⑥ Pin Length:
 - A/B/C Please mark the desired length in the A/B/C
- ⑦ Code Packing:
 - 0: Bag

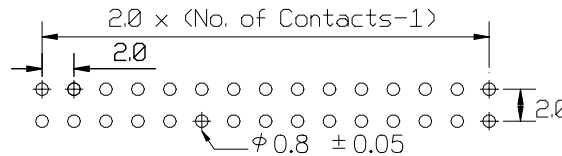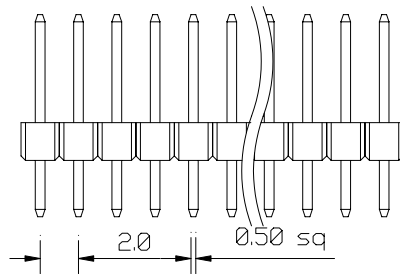

Recommended P.C.B Layout

UNLESS OTHERWISE SPECIFIED TOLERANCE ANG. 0. 0 ±0.25 00 ±0.2	 <small>www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25</small>	
DRAWN		TITLE: 2.0 mm Pin Header, Straight Type Dual Row
CHECKED		
APPROVED		DRAWN NO: DPD01-XXBXX-1
REV		PRODUCT NO. DPD01-XXBXXX
DESCRIPTION		
DATE		

REV

DESCRIPTION

DATE

PRODUCT NO. DPD01-XXBXXX