
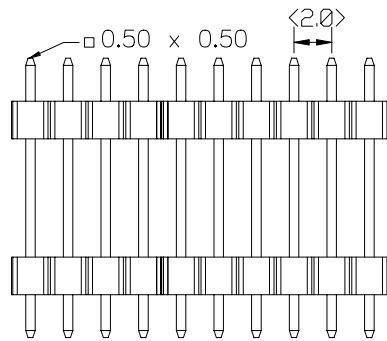



RoHS compliant

SPECIFICATION

Current Rating: 1 Amp
 Insulation Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms Max
 Dielectric Withstanding: AC 500 V
 Operating Temperature: -65 ° C to +125° C
 Contact Material: Brass
 Insulator Material: Polyester, UL 94V-0
 Standard : PBT

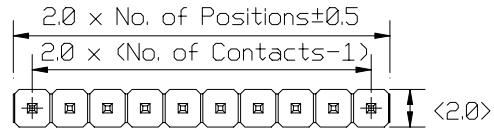


TYPE A




Ordering Code:

DPD02- X - X - A - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contact: 01 TO 40
- ③ Contact Plating:
 A: Gold Flash
 E: 3u" Gold
 B: 10u" Gold
 C: 15u" Gold
- ④ Connector Type:
 A: Single Row
- ⑤ Body Height:
 H1: 1.5mm
 H2: 2.0mm
- ⑥ Pin Length:
 A/B/C Please mark the desired length in the A/B/C
- ⑦ Code Packing:
 0: Bag

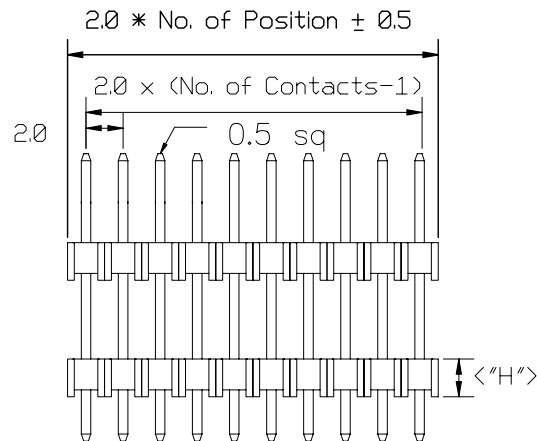

TYPE B

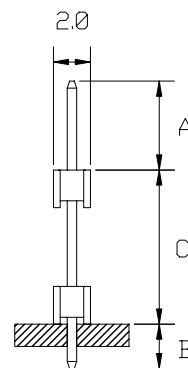

UNLESS OTHERWISE SPECIFIED TOLERANCE		 www.allconnectors.eu info@allconnectors.eu Tel: +49 (0)711 / 358 110 20 Fax: +49 (0)711 / 358 110 25
ANG. 0. 0 ±0.25 .00 ±0.2		
SCALE: AS SHOWN	UNIT: mm	TITLE: 2.0 mm Pin Header, Straight Type Single Row DRAWN NO: DPD02-XXAXX-1 PRODUCT NO. DPD02-XXAXX
DRAWN		
CHECKED		
APPROVED		
REV	DESCRIPTION	DATE