
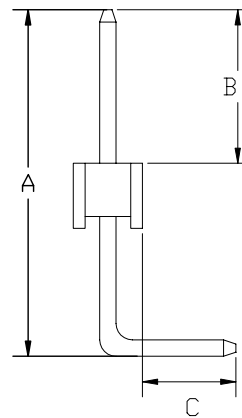
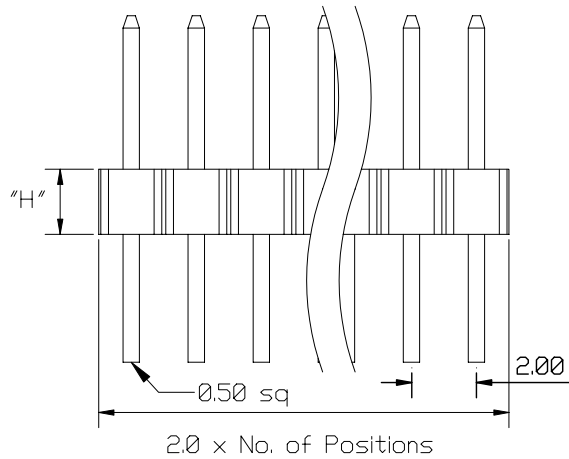


RoHS compliant

# SPECIFICATION


Current Rating: 1 Amp  
 Insulation Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms Max  
 Dielectric Withstanding: AC 500 V  
 Operating Temperature: -65 ° C to +125° C  
 Contact Material: Brass  
 Insulator Material: Polyester, UL 94V-0  
 Standard : PBT

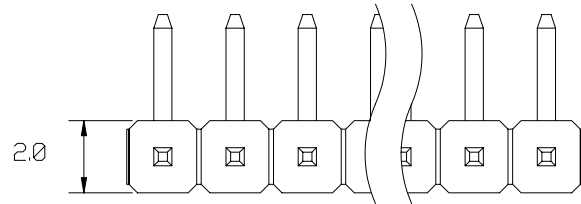

Ordering Code:

DPR01- X - X - A - X - X - X  
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contact: 01 TO 40
- ③ Contact Plating:  
 A: Gold Flash  
 E: 3u" Gold  
 B: 10u" Gold  
 C: 15u" Gold
- ④ Connector Type:  
 A: Single Row
- ⑤ Body Height:  
 H1: 1.5mm  
 H2: 2.0mm
- ⑥ Pin Length:  
 A/B/C Please mark the desired length in the A/B/C
- ⑦ Code Packing:  
 0: Bag

UNLESS OTHERWISE SPECIFIED TOLERANCE  ANG. 0. 0 ±0.25 00 ±0.2	 <small>www.allconnectors.eu   info@allconnectors.eu                  Tel. +49 (0)711 / 358 110 20   Fax +49 (0)711 / 358 110 25</small>		
			SCALE: AS SHOWN
DRAWN	TITLE: 2.0 mm Pin Header		
CHECKED	Single Row, Right Angle Type		
APPROVED	DRAWN NO: DPR01-XXAXX-1		
REV	DESCRIPTION	DATE	PRODUCT NO. DPR01-XXAXX