
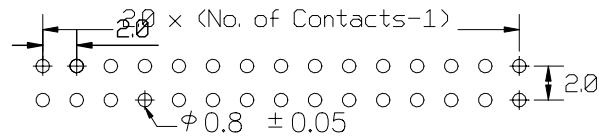

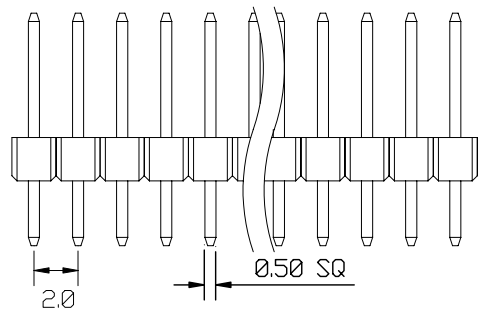


RoHS compliant

SPECIFICATION

Current Rating: 1 Amp
 Insulation Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms Max
 Dielectric Withstanding: AC 500 V
 Operating Temperature: -65 ° C to +125° C
 Contact Material: Brass
 Insulator Material: Polyester, UL 94V-0
 Standard : PBT

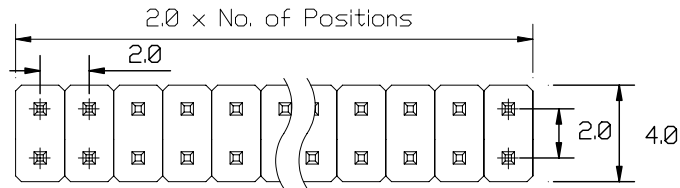

Recommended P.C.B Layout

Ordering Code:

DPR01- X - X - B - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contact: 02 TO 80
- ③ Contact Plating:
 A: Gold Flash
 E: 3u" Gold
 B: 10u" Gold
 C: 15u" Gold
- ④ Connector Type:
 B: Dual Row
- ⑤ Body Height:
 H1: 1.5mm
 H2: 2.0mm
- ⑥ Pin Length:
 A/B/C Please mark the desired length in the A/B/C
- ⑦ Code Packing:
 0: Bag

UNLESS OTHERWISE SPECIFIED TOLERANCE ANG. 0. 0 ±0.25 00 ±0.2	 <small>www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25</small>		
			SCALE: AS SHOWN
DRAWN	TITLE: 2.0 mm Pin Header		
CHECKED	Dual Row, Right Angle Type		
APPROVED	DRAWN NO: DPR01-XXBXX-1		
REV	DESCRIPTION	DATE	PRODUCT NO. DPR01-XXBXX