
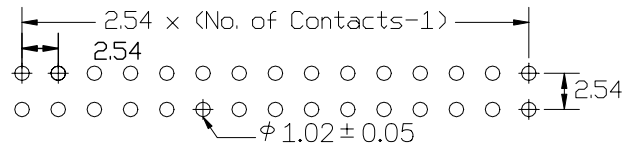

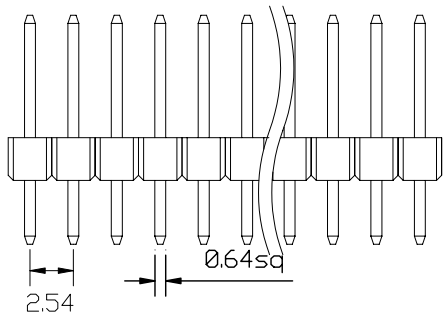


RoHS compliant

# SPECIFICATION

Current Rating: 1 Amp  
 Insulation Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms Max  
 Dielectric Withstanding: AC 500 V  
 Operating Temperature: -65 ° C to +125° C  
 Contact Material: Brass  
 Insulator Material: Polyester, UL 94V-0  
 Standard : PBT

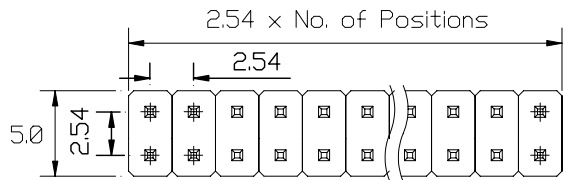

Recommended P.C.B Layout

Ordering Code:

EPD01- X - X - B - X - X - X  
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contact: 02 TO 80
- ③ Contact Plating: A: Gold Flash, E: 3u" Gold, B: 10u" Gold, C: 15u" Gold
- ④ Connector Type: B: Dual Row
- ⑤ Pin Length: A:11.6 B:6.0 C:3.0 (Standard). Please mark the desired length in the A/B/C
- ⑥ Code Packing: 0: Bag

UNLESS OTHERWISE SPECIFIED TOLERANCE  ANG. 0. 0 ±0.25 00 ±0.2	<b>Allconnectors</b> <small>www.allconnectors.eu   info@allconnectors.eu Tel: +49 (0)711 / 356 110 20   Fax: +49 (0)711 / 356 110 25</small>
DRAWN	TITLE: 2.54 mm Pin Header, Straight Type Dual Row
CHECKED	
APPROVED	DRAWN NO: EPD01-XXBX-1
REV	PRODUCT NO. EPD01-XXBXX

REV	DESCRIPTION	DATE
-----	-------------	------