

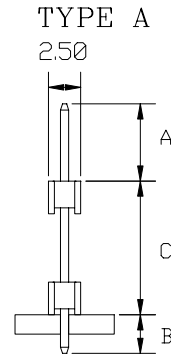
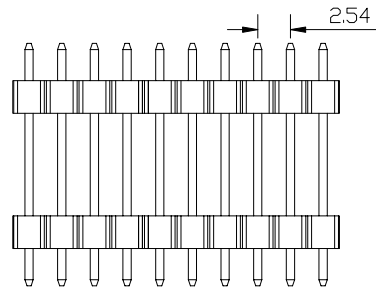
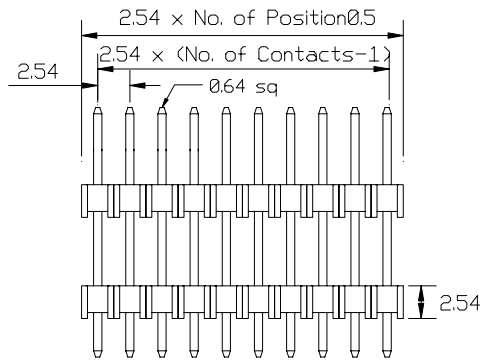


RoHS compliant

SPECIFICATION

Current Rating: 1 Amp
 Insulation Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms Max
 Dielectric Withstanding: AC 500 V
 Operating Temperature: -65 ° C to +125° C
 Contact Material: Brass
 Insulator Material: Polyester, UL 94V-0
 Standard : PBT

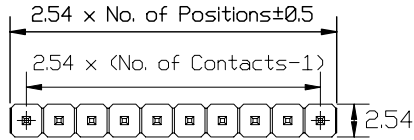

Ordering Code:

EPD02- X - X - A - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No: ⑤ Pin Length
A/B/C
- ② No. of Contact: 01 TO 40 Please mark the desired length in the A/B/C
- ③ Contact Plating: A: Gold Flash ⑥ Code Packing
E: 3u" Gold ⑦: Bag
B: 10u" Gold
C: 15u" Gold
- ④ Connector Type
A: Single Row

UNLESS OTHERWISE SPECIFIED TOLERANCE		 www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25
ANG. 0. 0 ±0.25 .00 ±0.2		
SCALE: AS SHOWN	UNIT: mm	
DRAWN	CHECKED	TITLE: 2.54 mm Pin Header, Straight Type Single Row
APPROVED		DRAWN NO: EPD02-XXAXX-1
		PRODUCT NO. EPD02-XXAXX

REV	DESCRIPTION	DATE