



RoHS compliant

SPECIFICATION




Current Rating: 1 Amp
 Insulation Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms Max
 Dielectric Withstanding: AC 500 V
 Operating Temperature: -65 ° C to +125° C
 Contact Material: Brass
 Insulator Material: Polyester, UL 94V-0
 Standard : PBT

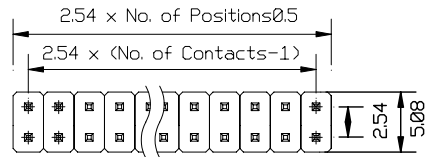

TYPE A

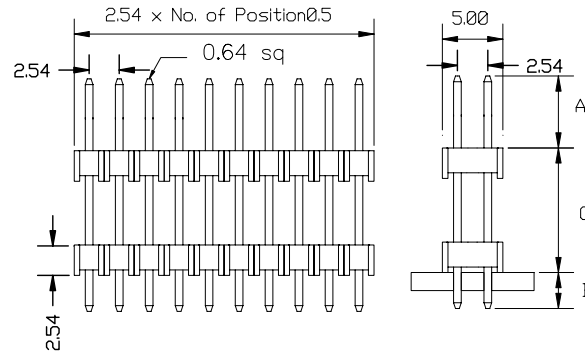

TYPE B

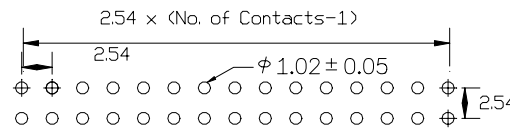

Recommended P.C.B Layout

Ordering Code:

EPD02- X - X - B - X - X - X
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contact: 02 TO 80
- ③ Contact Plating:
 A: Gold Flash
 E: 3u" Gold
 B: 10u" Gold
 C: 15u" Gold
 T: Tin Plating
- ④ Connector Type:
 B: Dual Row
- ⑤ Pin Length: A/B/C
 Please mark the desired length in the A/B/C
- ⑥ Special Function:
 A: Type A
 B: Type B
- ⑦ Code Packing:
 0: Bag

UNLESS OTHERWISE SPECIFIED TOLERANCE ANG. 0. 0 ±0.25 00 ±0.2	 www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25
DRAWN	TITLE: 2.54 mm Pin Header, Straight Type Dual Row
CHECKED	
APPROVED	DRAWN NO: EPD02-XXBXX-1
DATE	PRODUCT NO. EPD02-XXBXX

REV	Add option of plating	07/11/12
	DESCRIPTION	DATE