
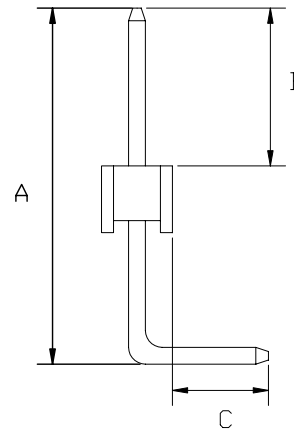
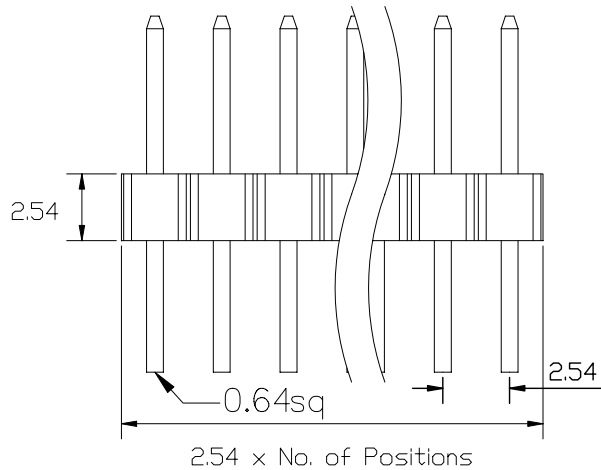


RoHS compliant

# SPECIFICATION

Current Rating: 1 Amp  
 Insulation Resistance: 5000 Megohms min  
 Contact Resistance: 20 m ohms Max  
 Dielectric Withstanding: AC 500 V  
 Operating Temperature: -65 ° C to +125° C  
 Contact Material: Brass  
 Insulator Material: Polyester, UL 94V-0  
 Standard : PBT

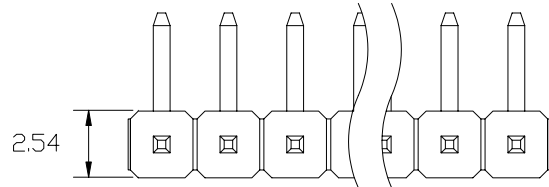

Ordering Code:

EPR01- X - X - A - X - X - X  
 ① ② ③ ④ ⑤ ⑥ ⑦

- ① Series No:
- ② No. of Contact  
01 TO 40
- ③ Contact Plating  
A: Gold Flash  
E: 3u" Gold  
B: 10u" Gold  
C: 15u" Gold
- ④ Connector Type  
A: Single Row
- ⑤ Pin Length  
A/B/C  
Please mark the desired length in the A/B/C
- ⑥ Code Packing  
0: Bag

UNLESS OTHERWISE SPECIFIED TOLERANCE		 <small>www.allconnectors.eu   info@allconnectors.eu Tel. +49 (0)711 / 358 110 20   Fax +49 (0)711 / 358 110 25</small>
ANG. 0. 0 ±0.25 .00 ±0.2		
SCALE: AS SHOWN	UNIT: mm	
DRAWN		TITLE: 2.54 mm Pin Header
CHECKED		Single Row, Right Angle Type
APPROVED		DRAWN NO: EPR01-XXAXX-1
REV		PRODUCT NO. EPR01-XXAXX

REV	DESCRIPTION	DATE