
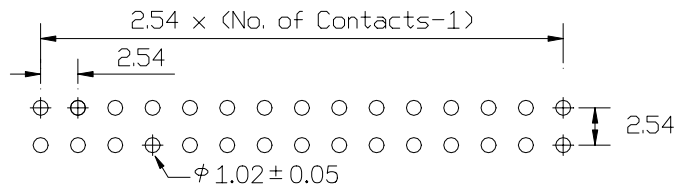

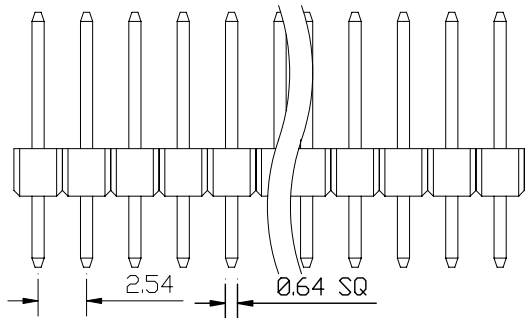


RoHS compliant

SPECIFICATION

Current Rating: 1 Amp
 Insulation Resistance: 5000 Megohms min
 Contact Resistance: 20 m ohms Max
 Dielectric Withstanding: AC 500 V
 Operating Temperature: -65 ° C to +125° C
 Contact Material: Brass
 Insulator Material: Polyester, UL 94V-0
 Standard : PBT

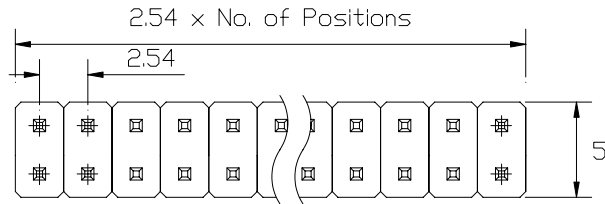


Recommended P.C.B Layout

Ordering Code:

EPR01- X - X - B - X - X
 ① ② ③ ④ ⑤ ⑥

- ① Series No:
- ② No. of Contact
02 TO 80
- ③ Contact Plating
A: Gold Flash
E: 3u" Gold
B: 10u" Gold
T: Tin plated
C: 15u" Gold
- ④ Connector Type
B: Dual Row
- ⑤ Pin Length
A/B/C
Please mark the desired length in the A/B/C
- ⑥ Code Packing
0: Bag

UNLESS OTHERWISE SPECIFIED TOLERANCE		 <small>www.allconnectors.eu info@allconnectors.eu Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25</small>
ANG. 0. 0 ±0.25 .00 ±0.2		
SCALE: AS SHOWN	UNIT: mm	
DRAWN		TITLE: 2.54 mm Pin Header Dual Row, Right Angle Type
CHECKED		
APPROVED		DRAWN NO: EPR01-XXBXX-1
REV		PRODUCT NO. EPR01-XXBXX
DESCRIPTION		
DATE		