






N : Number of contact

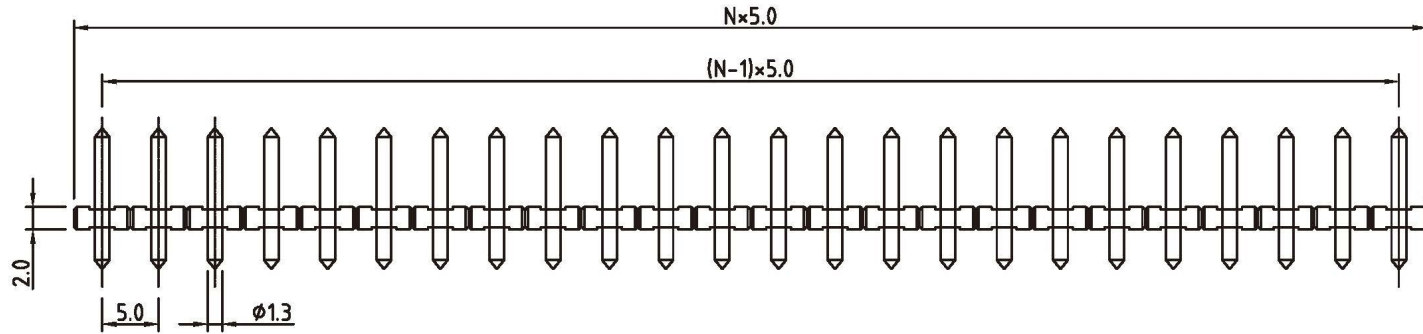

P.C.B. LAYOUT

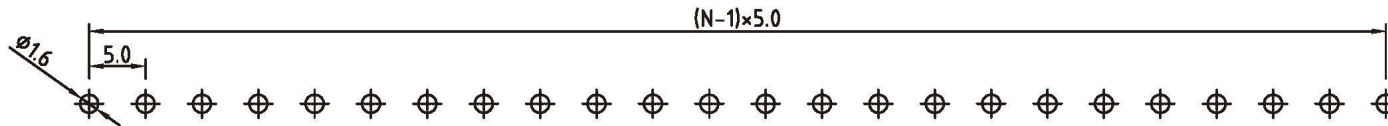

Technical Data:

Material:

- ▲ ● Pin : Brass nickel and Tin plated
- Insulator body(housing): Polyamide(Glass filled)(UL94V-0)

Electrical

- Voltage rating: 250VAC
- Current rating: 10 Amps/way max
- Insulation resistance: 5000M Ω /1000V
- Withstanding Voltage: 1500VAC(1min) Test time=60sec/1pcs

Mechanical:


- Operating temperature: -55°C to +105°C
- Contact retention force: 2Kg
- Soldering reliability:
Test temperature= 250°C \pm 10°C
5 seconds max

Safety approval defa:   

Allconnectors


www.allconnectors.de info@allconnectors.de
Tel.: 0049 711 7009503 Fax: 0049 711 7009504
70794 Filderstadt - Germany Kettenerstr. 25

RoHS Compliant


DRAWING BY CY	
CHECKED BY GENIUS	
UNIT/ mm	SCALE 1 : 1
DATE	
SIZE A4	PJECTION 

TOLERANCES ARE

X. \pm
.X \pm 0.30
.XX \pm 0.10
.XXX \pm
ANG \pm



ORDER INFORMATION

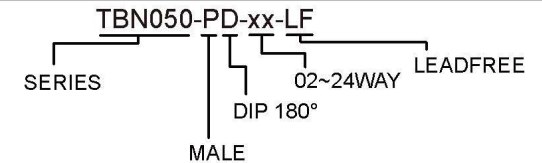

DESCRIPTION: 5.0mm MALE BASE PIN