

**MATERIAL:**

INSULATOR :Hi-temp PPS UL 94V-0  
 Contact material:phosphor bronze JIS 5210  
 Contact Platred :120 $\mu$ "tin over 30 $\mu$ "nickel

**SPECIFICATIONS:**

Temperature range:-50°C to 105°C  
 CURRENT Rating :1 AMP  
 Capacitance:1.0 Picoforads (Max)  
 Contact resistance:30 Milliohms (Max)  
 Insulation Resistance :1000 Megohms (Min)  
 Withstanding Voltage: AC 600 Vrms

**MIDDLE TYPE:**

NO OF CONTACT	A±0.15	B±0.15	C±0.1	D±0.1	E±0.1	F±0.1
20 PPS PBT	15.50	15.50	5.08	5.08	5.08	5.08
28 PPS PBT	18.04	18.04	7.62	7.62	7.62	7.62
32 PPS PBT	20.60	18.04	7.62	10.16	7.62	10.16
44 PPS PBT	23.48	23.48	12.70	12.70	12.70	12.70
52 PPS PBT	25.88	25.88	15.24	15.24	15.24	15.24
68 PPS PBT	31.04	31.04	20.32	20.32	20.32	20.32
84 PPS PBT	36.04	36.04	25.40	25.40	25.40	25.40
68 PBT	31.66	31.66	20.32	20.32	20.32	20.32
84 PBT	36.66	36.66	25.40	25.40	25.40	25.40

**THIN TYPE:**

NO OF CONTACT	A±0.15	B±0.15	C±0.1	D±0.1	E±0.1	F±0.1
44	23.48	23.48	12.70	12.70	12.70	12.70
68	31.04	31.04	20.32	20.32	20.32	20.32
84	36.04	36.04	25.40	25.40	25.40	25.40

**All Connectors**

www.allconnectors.de info@allconnectors.de  
 Tel.: 0049 711 7009503 Fax: 0049 711 7009504  
 70794 Filderstadt - Germany Kettnerstr. 25


**RoHS Compliant**

DRAWING BY CY  
 CHECKED BY GENIUS  
 UNIT/mm SCALE 1:1  
 DATE  
 SIZE A4


TOLERANCES ARE

X ±  
 .X ± 0.25  
 .XX ± 0.15  
 .XXX ± 0.006  
 ANG ±

P PROJECTION



**ORDER INFORMATION**

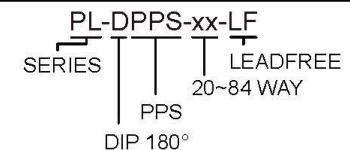

**DESCRIPTION:**