
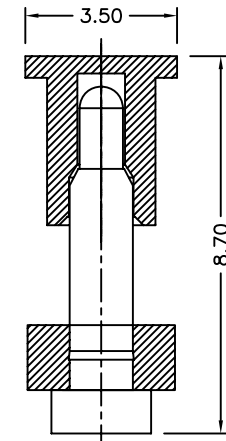


NOTE:

1. MATERIAL&FLASH/PLATED
 - 1.1 TOP PROBE: BRASS(LEAD Less Free)
PLATING: GOLD 10u" MIN ON ALL
 - 1.2 BOTTOM PROBE: BRASS(LEAD Less Free)
PLATING: GOLD 3u" MIN ON ALL
 - 1.3 HOUSING: HIGH TEMP. THERMOPLASTIC
UL94V-0,COLOR: BLACK
 - 1.4 CAP: HIGH TEMP. THERMOPLASTIC
UL94V-0,COLOR: BLACK
 - 1.5 SPRING: STAINLESS STEEL WIRE
2. PRODUCT SPECIFICATION
 - 2.1 STROKE: 1.10mm MIN
 - 2.2 CONTACT RESISTANCE: 50MILLIOHMS MIN
 - 2.3 WHEN THE STROKE IS 1.10mm
THE NORMAL FORCE SHALL BE 60~80g
 - 2.4 DURABILITY: 10000 CYCLES,[SPRING FORCE LOSS 20%]

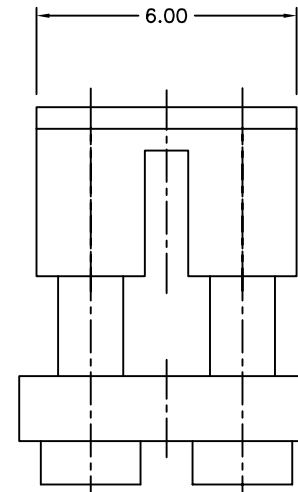

UNLESS OTHERWISE SPECIFIED TOLERANCE

ANG.	±5
0.	±0.3
.0	±0.25
.00	±0.20

SCALE: AS SHOWN UNIT: mm

DRAWN Willis 2009/03/04

CHECKED / /

APPROVED / /



SIZE A4 REV.

Allconnectors

www.allconnectors.eu | info@allconnectors.eu
Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

DRAWN NAME: POGO Pin Two Pin type H=8mm

PRODUCT NO. 303B-611923-35-000

FILE NAME: 303B-611923-35-000_B_1

REV.	DESCRIPTION	DATE	SIZE	REV.
1			A4	