
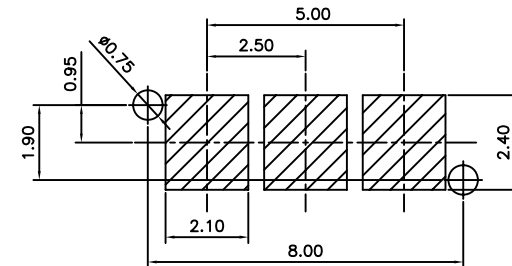
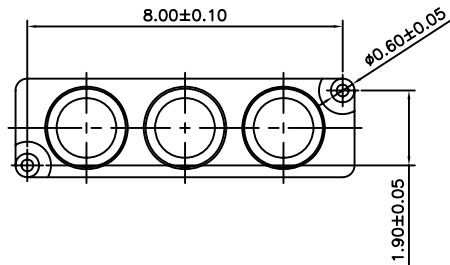
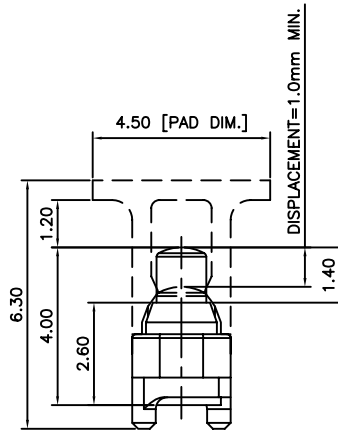


NOTES

1. MATERIAL & FLASH/PLATED
 - 1.1 HOUSING: HIGH TEMP. THERMOPLASTIC+GLASS FIBRE [UL 94V-0]; COLOR: BLACK
 - 1.2 PROBE: BRASS
 - .PLATING: TOP PROBE 10u" MIN. GOLD ON ALL, BOTTOM PROBE 3u" MIN. GOLD ON ALL, BUSHONG PROBE 3u" MIN. GOLD ON ALL,
 - 1.3 SPRING: STAINLESS
2. PRODUCT SPECIFICATION
 - 2.1 DISPLACEMENT: 1.0mm
 - 2.2 CONTACT RESISTANCE: 50MILLIOHMS MAX.
 - 2.3 NORMAL FORCE: PRE-LOAD=0gf MIN. DISPLACEMENT: 1.0mm FORCE=110±30gf
 - 2.4 DURABILITY: 10,000CYCLE [SPRING FORCE 20% LOSS]. NOTES: REDUCTION OF ORIGINAL FORCE 20% LOSS.
4. PACKAGE: TAPE REEL
5. WEIGHT [WITH PAD]: 0.20±0.05g/pcs
6. PC BOARD THICKNESS: 1.0mm REF.

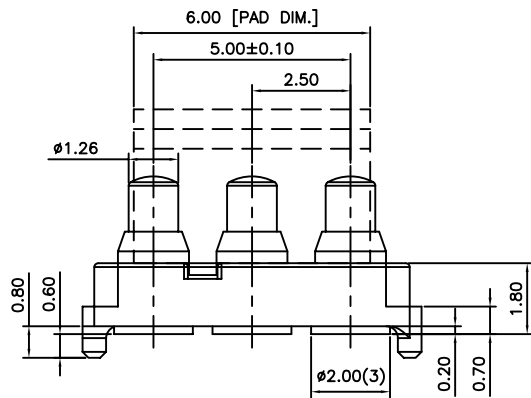

RECOMMENDED PC BOARD LAYOUT
 TOLERANCE: ±0.05mm [TOP VIEW]
 THINKNESS: 1.00mm REF.

						UNLESS OTHERWISE SPECIFIED TOLERANCE		 <small>www.allconnectors.eu info@allconnectors.eu</small> <small>Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25</small>	
						ANG. ±5 0. ±0.3 .0 ±0.25 .00 ±0.20			
						SCALE: AS SHOWN	UNIT: mm	DRAWN NAME:	
						DRAWN Willis	2009/03/04	POGO Pin Three pin type H=4mm	
						CHECKED	/ /	PRODUCT NO. 303C-261420-25-000	
						APPROVED	/ /	FILE NAME: 303C-261420-25-000_B_1	
REV.	DESCRIPTION					DATE	 SIZE A4	REV.	