
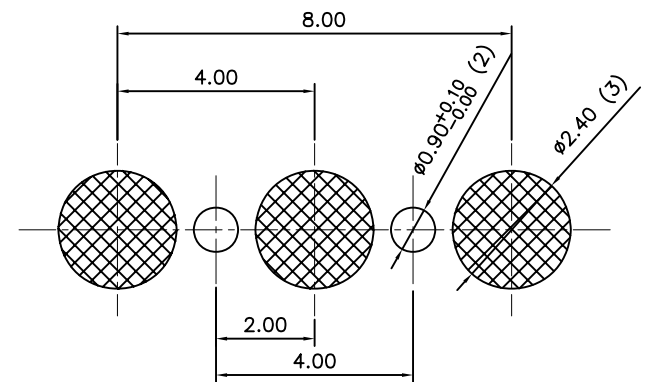
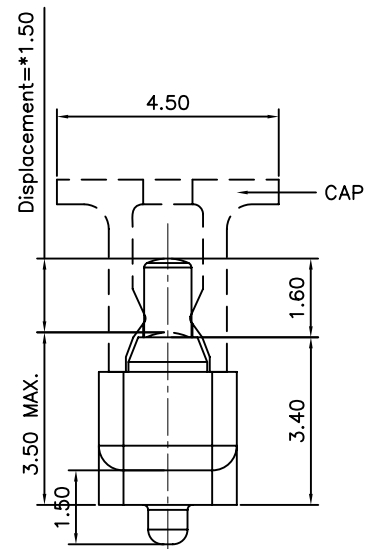


- NOTES
- MATERIAL & FLASH/PLATED
 - HOUSING: NY-6T HIGH TEMP. THERMOPLASTIC+GLASS FIBRE .[UL 94V-0]; COLOR: BLACK
 - PROBE: COPPER ALLOY .PLATING: GOLD ON CONTACT AREA
 - SPRING: STAINLESS SERIES .PLATING: NONE PLATING
 - PRODUCT SPECIFICATION
 - DISPLACEMENT: 1.10 mm.MIN.
 - CONTACT RESISTANCE: 20MILLIOHMS MAX.
 - NORMAL FORCE: PRE-LOAD=0gf MIN. FULL-LOAD=160±30gf .NOTES: FULL-LOAD DISPLACEMENT: 1.5±0.1mm
 - DURABILITY: 10,000CYCLE [SPRING FORCE 20% LOSS] .NOTES: REDUCTION OF ORIGINAL FORCE 20% LOSS.
 - PACKAGE: TAPE REEL
 - PC BOARD THICKNESS: 1.0mm REF.

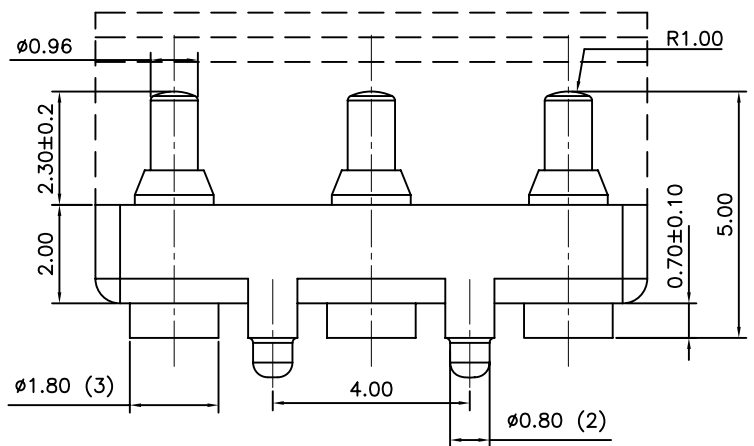

RECOMMENDED PC BOARD LAYOUT
TOLERANCE: ±0.05mm [TOP VIEW]
THICKNESS: 1.00mm REF.

						UNLESS OTHERWISE SPECIFIED TOLERANCE		 <small>www.allconnectors.eu info@allconnectors.eu</small> <small>Tel. +49 (0)711 / 358 110 20 Fax +49 (0)711 / 358 110 25</small>	
						ANG. ±5 0. ±0.3 .0 ±0.25 .00 ±0.20			
						SCALE: AS SHOWN		UNIT: mm	
						DRAWN Willis		2009/03/04	
						CHECKED		/ /	
						APPROVED		/ /	
REV.						DATE		SIZE A4	
DESCRIPTION								DRAWN NAME: POGO Pin Three pin type H=5mm	
								PRODUCT NO. 303C-341618-40-000	
								FILE NAME: 303C-341618-40-000_B_1	