

JMD4A POWER CONNECTOR

[Back to product list](#)

Type

插座（装配插针）:JMD-4AZ

插头（装配插孔）:JMD-4AT




Operating Environment

Operating Temperature	-55 to + 125 °C
Relative Humidity	98% (40 °C)
Vibration	10 to 2,000Hz (a = 147m/s ²)
Shock	Acceleration 980m/s ²


Main Technical Specifications

Insulation Resistance		≥ 1,000MΩ
Mechanical Life		1,000 times
Housing Material		PET G30 UL94V-0 Black
Contact	Spec.	Power Contact
		#12
	Quantity	4
	Rated Current	35A
	Rated Voltage	400V/630V
	Contact Resistance	≤1.00mΩ
	Withstand Voltage	2,000V/3,000V
	Surface Material	Silver plated over nickel
	Terminal Style	Pins: PCB Tail (Bending Pin); Sockets: 400V - Crimping, PCB Tail, Solder Cup 630V- Crimping
	Material	Pin and Socket
Crown Spring		Beryllium bronze

External Sizes and Installation Dimensions (mm)

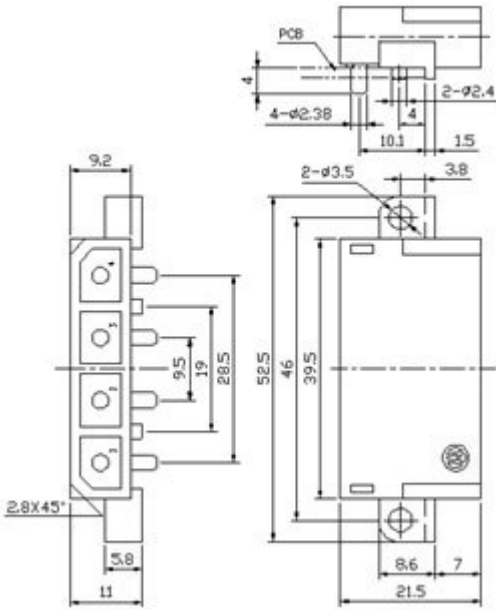

JMD-4Z

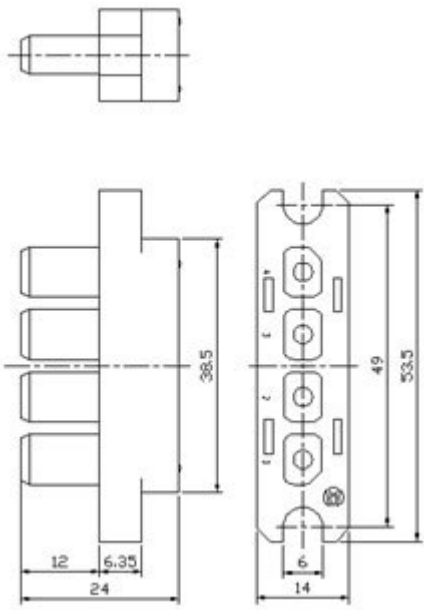

JMD-4T