
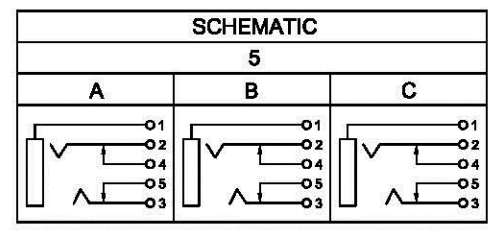


REV.	ECN.	DATE	DWN	APVD

**SPECIFICATION:**

CURRENT RATING : DC 12V, 2A MAX.  
 AC 100V, 1A MAX.  
 DIELECTRIC WITHSTANDING VOLTAGE : 500V AC PER MINUTE  
 INSULATION RESISTANCE : 100MΩ MIN. AT 500V DC.  
 CONTACT RESISTANCE : 30mΩ MAX.

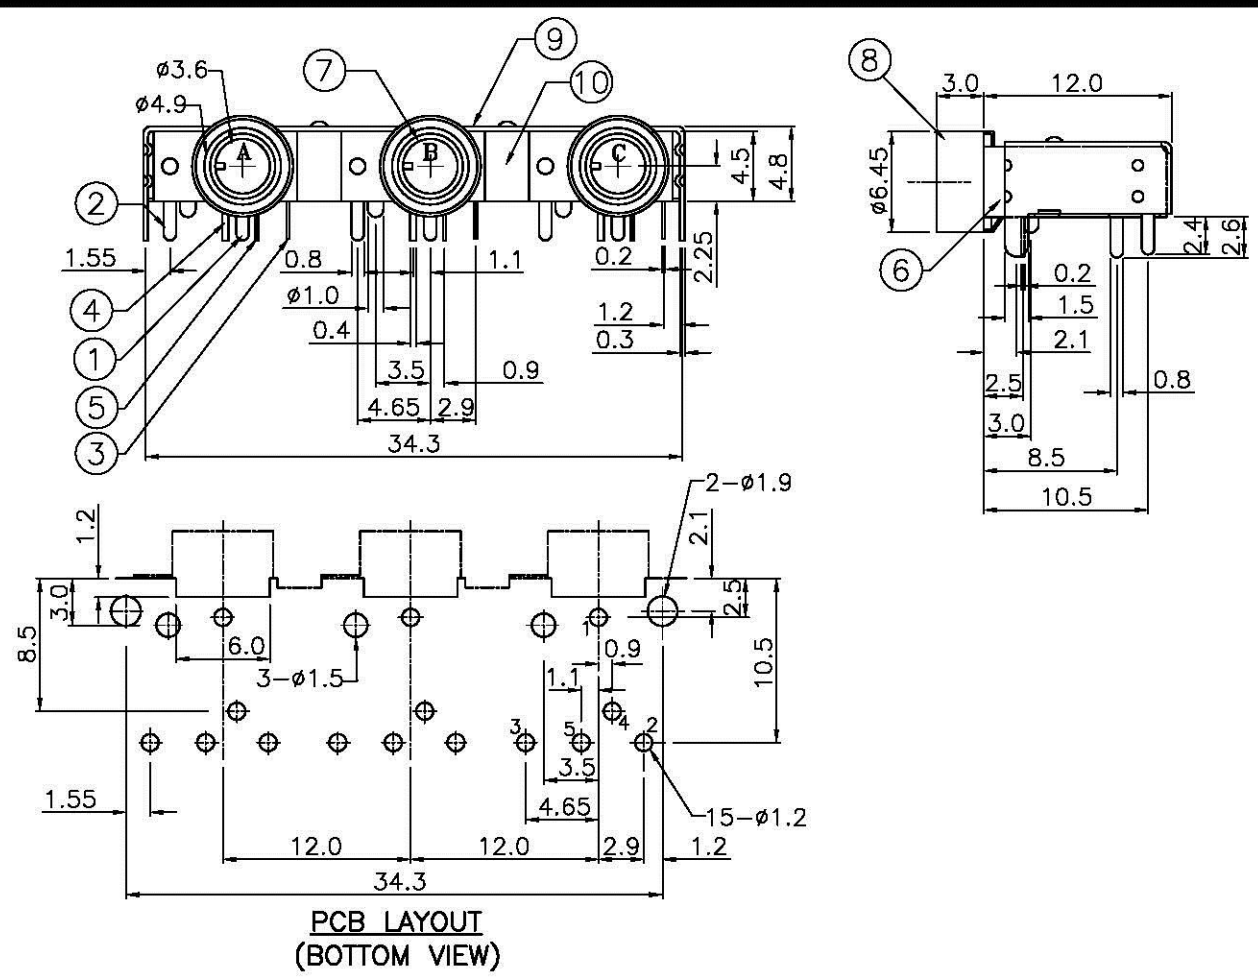

**Order Information :**

**J E B 1 0 - 5 3 T 1 C 1 1 - R**  
**1 2 3 4 5 6 7**

1. SERIES NUMBER	JEB10 : Ø3.5mm EARPHONE JACK
2. SCHEMATIC OPTION	5 (SEE ABOVE DRAWING)
3. TERMINAL PLATING	T : TIN
4. INSULATOR COLOR (A/B/C)	1 : ALL BLACK 9 : PINK(701C)/LIGHT BLUE(284C)/LIME(577C)
5. INSULATOR MATERIAL	C : NYLON
6. BUSHING PLATING	1 : NICKEL
7. GREEN PRODUCT	BLANK : NOT GREEN PRODUCT R : RoHS COMPLIANT

NO.	NAME	MATERIAL	FINISH
1	GROUND TERM.	PBS	TIN PLATED
2	TIP SPRING	PBS	TIN PLATED
3	RING SPRING	PBS	TIN PLATED
4	TIP BREAK	BRASS	TIN PLATED
5	RING BREAK	BRASS	TIN PLATED
6	HOUSING	NYLON PA9T G.F.	
7	BUSHING	BRASS	NICKEL PLATED
8	BARREL	BRASS	TIN PLATED
9	BACK SHIELD	SPCC ; T=0.3	NICKEL PLATED
10	HOLDER	NYLON PA9T G.F.	BLACK

**Allconnectors**  
 www.allconnectors.de  
 Tel.: 0343 711 7002503  
 70791 Pfladerst. - Germany  
 info@allconnectors.de  
 Fax: 0343 711 7002504  
 kelt@emtrn.25

SIZE A4 UNIT mm SCALE 2/1 SHEET 1 OF 1

GENERAL TOLERANCE ± 0.3	DRAWN. JEAN	DATE 01 - 24 - 2006	DRAWING NO. JEB10-53TXC11-R	C11010
ANGLE TOLERANCE ± 1° RADIUS ± 0.25 HOLE ± 0.13	CHECKED. HENRY	DATE 02 - 09 - 2006	TITLE. Ø3.5mm EARPHONE JACK	
	APPROVED. HENRY	DATE 02 - 09 - 2006	PART NO. JEB10-53TXC11-R	REV A.0