


SPECIFICATION

- 1. Rating : DC 30V 0.5A ;
- 2. Contact resistance : $\leq 0.03\Omega$;
- 3. Insulation resistance : $\geq 100M\Omega$ (DC250V) ;
- 4. Withstand voltage : 500VAC ;
- 5. Insertion and extraction force : 3-20N;
- 6. life test : 5,000 cycles .

PJ-R12P-05-LF
LEADFREE

RoHS Compliant

SCHEMATIC

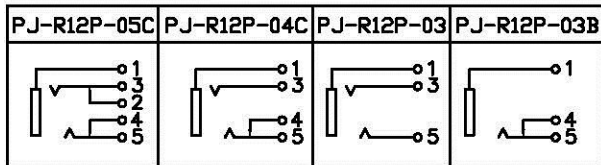

NO.	DESCRIPTION	QTY	MATERIAL	PLATING
7	HOUSING	1	PBT/PA66	
6	COVER	1	PBT/PA66	
5	SPRING PIECE	1	PHOSPHOR BRONZE	Ag-Plating
4	CURVE PIECE	1	H62 BRASS	Ag-Plating
3	SPRING PIECE	1	PHOSPHOR BRONZE	Ag-Plating
2	CURVE PIECE	1	H62 BRASS	Ag-Plating
1	FLAT PIECE	1	H62 BRASS	Ag-Plating

Allconnectors

PART NO. PJ-R12P-xx

www.allconnectors.de
Tel.: 0049 711 7003500
allconnectors@allconnectors.de

info@allconnectors.de
Fax: 0049 711 7003504
kontakt@allconnectors.de

DWG NO. PJ-R12P-xx

CHECKED BY CY

FILE NO.

DRAWING BY

UNIT / mm

SCALE 1:1

PROJECTION

TOLERANCES ARE
.X ± 0.3
.XX ±
.XXX ±
AWG

DESCRIPTION:			
AREA	REVISIONS	HK	DATE