



NO.	NAME	MATERIAL	FINISH	QTY
1	GROUND TERM.	PHOS.BRONZE 0.25	TIN PLATED	1
2	TIP TERM.	PHOS.BRONZE 0.25	TIN PLATED	1
3	RING TERM.	PHOS.BRONZE 0.25	TIN PLATED	1
4	HOUSING	PBT G.F.	SEE COLOR	1

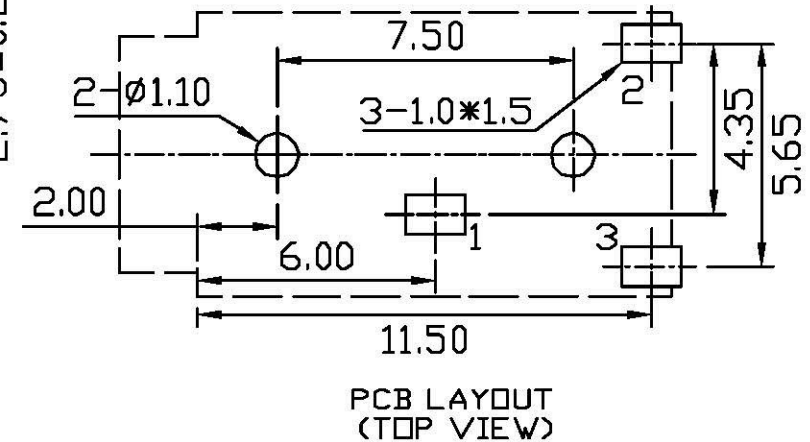

MODEL NO.	PJ-R27-03 (PC99 COLOR)					
	A	B	C	D	E	F
HOUSING COLOR	PINK	BLACK	LIME	YELLOW	ORANGE	LIGHT BLUE
PANTONE	701C		577C	123C	157C	284C



Specification:

Contact Resistance: 30m Ohm. Max. At AC 100mA Max. 1KHz

Insulation Resistance: 100M Ohm Min. At 500V DC.

Rated Voltage And Current: DC 12V, 2A Max ; AC 100V, 1A Max.

Dielectric Withstanding Voltage: 500V AC For 1 Minute.

Durability (Life Test):

A: For Phosphor Bronze 1500 Cycles Minimum.

B: For PBS 2000 Cycles Minimum.

Insertion Force: 0.3-3.0 Kg.

Extraction Force: 0.3-3.0Kg.

PJ-R27<sub>xx</sub>-03-LF  
LEADFREE  
BLANK:BLACK  
PK:PINK OR:ORANGE  
LM:LIME LB:LIGHT BLUE  
YL:YELLOW

RoHS Compliant

**Allconnectors**

www.allconnectors.de  
Tel: 0049 711 7009503  
40784 Hildesheim, Germany

info@allconnectors.de  
Fax: 0049 711 7009504  
Kulmburgstr. 25

PART NO. PJ-R27<sub>xx</sub>-03

DWG NO. PJ-R27<sub>xx</sub>-03

FILE NO.

UNIT / mm

SCALE 1:1

CHECKED BY CY

DRAWING BY

PROJECTION



TOLERANCES ARE

.X±0.2  
.XX±0.1  
.XXX±  
AWG

DESCRIPTION: ∅3.5 EARPHONE JACK FLAT 3 PIN DIP

AREA

REVISIONS

HK

DATE