
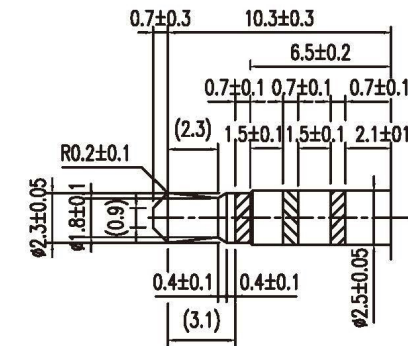


一般公差	
尺寸区分	公差
0>1.0	±0.1
1.0>6.0	±0.2
6.0>12.0	±0.3
12.0>25.0	±0.4
25.0>	±0.5

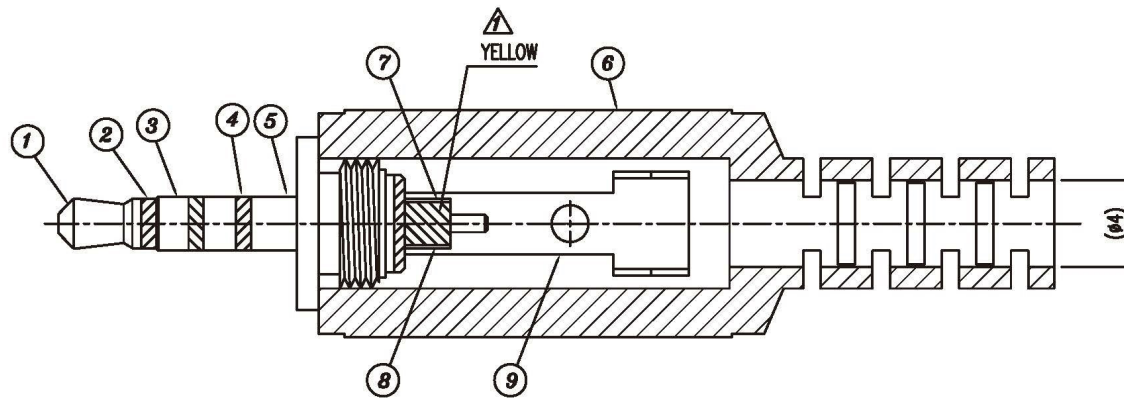

9	BRASS NICKEL
8	BRASS 2rd POLE NICKEL
7	BRASS 3rd POLE GOLD
6	TPR BLACK
5	BRASS NICKEL
4	POM BLACK
3	BRASS NICKEL
2	POM BLACK
1	BRASS NICKEL
NO	CONTENT

1. DIELECTRIC STRENGTH : AC 200V at 1 MIN
2. INSURATION RESISTANCE : DC 100V / 50MΩ MIN

**All Connectors**

www.allconnectors.de  
Tel.: 0049 711 7009503  
70794 Filderstadt - Germany

info@allconnectors.de  
Fax: 0049 711 7009504  
Kettenerstr. 25


**RoHS Compliant**

DRAWING BY CY  
CHECKED BY GENIUS  
UNIT/mm SCALE 1:1  
DATE  
SIZE A4


TOLERANCES ARE

X. ±  
.X ±  
.XX ±  
.XXX ±  
ANG ±

PJECTION



ORDER INFORMATION



DESCRIPTION: **ϕ2.5 PLUG 4-POLE (ASSEMBLY TYPE)**