
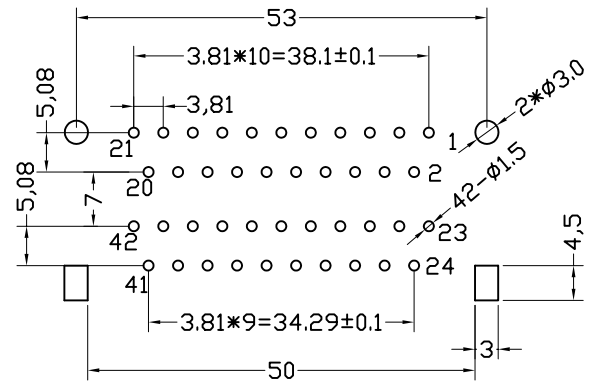
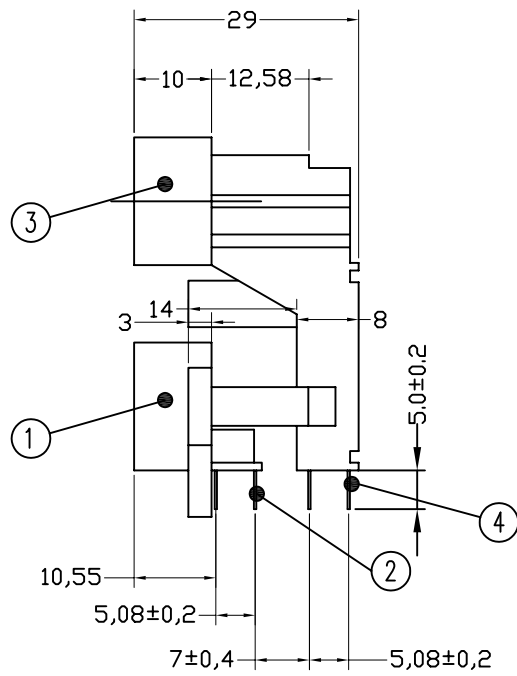


1 2 3 4 5 6 7 8 9 0

J  
I  
H  
G  
F  
E  
D  
C  
B  
A

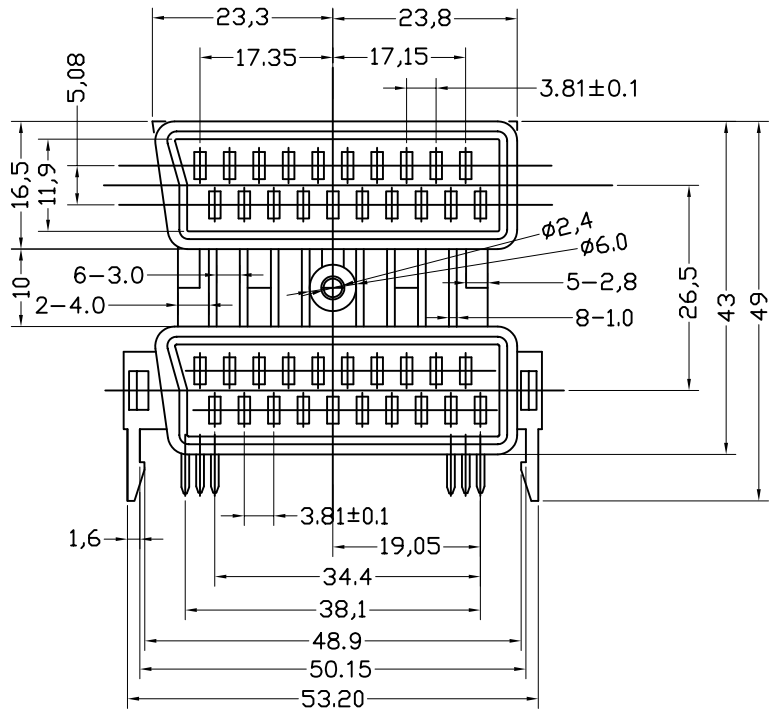

PCB HOLE PATTERN

MATERIAL:  
 A.INSULATOR:PC(94V 2)  
 B.CONTACT:BRONZE  
 C.CONTACT PLATED:TIN PLATED

SPECIFICATION:  
 A.CURRENT RATE:3A/250V AC

CONTACT RESISTANCE:  
 A.(BRONZE)11.5MΩ AT 2V DC 100mA  
 B.(PHOSPHOR BRONZE)10.9MΩ AT 2V DC 100mA  
 C.INSULATOR RESISTANCE:1.5GΩ AT 500V DC 1Min  
 D.dielectric withstanding:1000Vvar 1Min

SCB1-SRLH-21-LF  
 LEADFREE  
 RoHS Compliant

PART NO. SCB1-SRLH-21		CHECKED BY CY		TOLERANCES ARE .X ± 0.2 .XX ± 0.1 .XXX ± AWG	DESCRIP TION:			
DWG NO. SCB1-SRLH-21		DRAWING BY						
FILE NO.		PROJECTION		AREA	REVISIONS	HK	DATE	
UNIT / mm	SCALE 1 : 1							