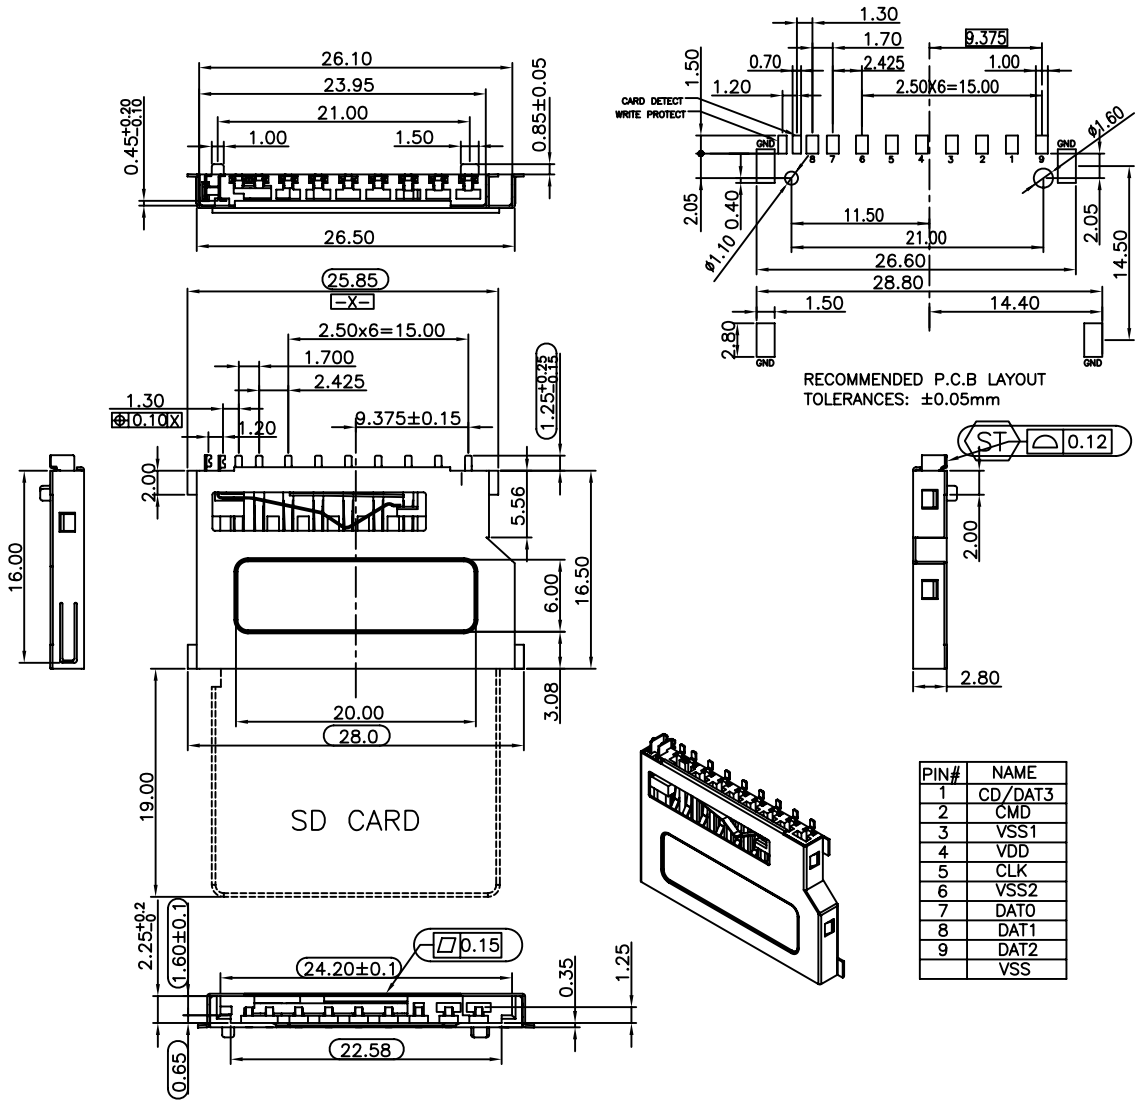

PIN#	NAME
1	CD/DAT3
2	CMD
3	VSS1
4	VDD
5	CLK
6	VSS2
7	DAT0
8	DAT1
9	DAT2
	VSS

SPECIFICATION
MATERIAL
Insulator: Thermal Plastic UL94V-0
Contacts: Copper Alloy
Shell: Copper Alloy
CONTACT PLATING
Underplate: 50u"~100u" Nickel
Contact Area: Gold flash, 3u",15u" Selective Gold
Solder Tails: 100u"~200u" Tin
ELECTRICAL
Operation Voltage: 250 VAC Max.
Current Rating: 0.5 Amps Max.
Contact Resistance: 100 mohms Max.
Insulation Resistance: 1000 Mohms Min @ 500 VDC
Dielectric Withstanding Voltage: 500 VAC / Minute
Temperature Range: -25°C To +90°C

PRODUCT NUMBER:
104C-T X A 0-R01
1 2 3 4

1.Type
T:Top Mount

2.Contact Plating
A:15u"Gold Plating
B:3u" Gold Plating
C:Gold Flash

3.Stand Off
A:0mm

4.RoHS

REV.	DESCRIPTION	DATE

UNLESS OTHERWISE SPECIFIED TOLERANCE
ANG. ±5°
0. ±0.3
.0 ±0.25
.00 ±0.20

SCALE: AS SHOWED UNIT: mm

DRAWN	Willis	2010/11/18
CHECKED	Angel	2010/11/18
APPROVED	Ken	2010/11/18

SIZE A4 REV.

AllConnectors
www.allconnectors.eu | info@allconnectors.eu
Tel. +49 (0)711 / 358 110 20 | Fax +49 (0)711 / 358 110 25

DRAWN NAME: SD Socket Short Type
PRODUCT NO. 104C-TXA0-R01
FILE NAME: 104C-TXA0-R01_B_2