

SWITCH CIRCUIT

MATERIAL AND FINISH AS BELOW

WHEN CARD IS EJECTED

WHEN CARD IS INSERTED

A	Housing	LCP+30% G/F
B	Contact	Phosphor Bronze C5210-EH, Contact Area:10u" Gold Plating
C	Shell	Stainless Steel SUS304R-3/4H, Solder Area:Gold Flash
D	Slider	LCP+30% G/F

E	Drag Link	Stainless Steel SUS304
F	Spring	Piano Wire
G	Switch	Phosphor Bronze C5191-H, Contact Area:Gold Flash
H		

CLOSE






OPEN





NOTES:

- DATE CODE 0202 (YWWD)
Y:0 YEAR(2010)
WW:20 WEEK(01-52)
D:2 DAY(01-07)
- 0202 WIDE x HIGH(6mm x 2mm)

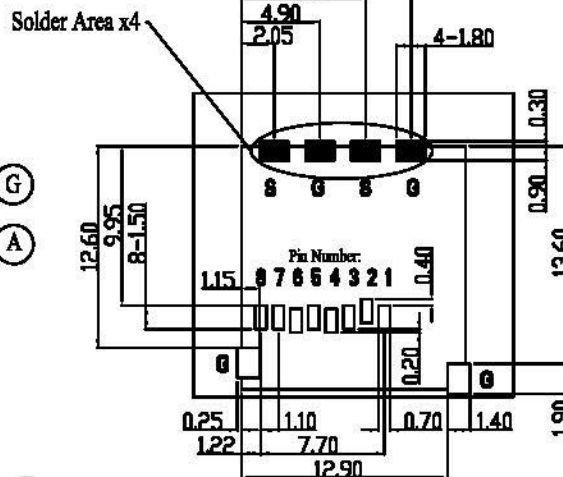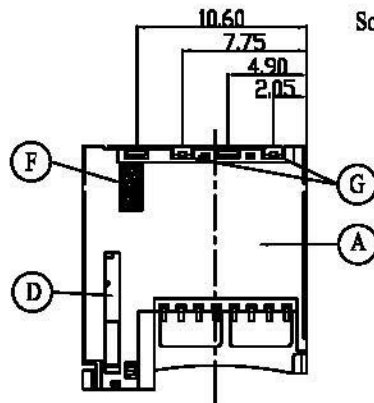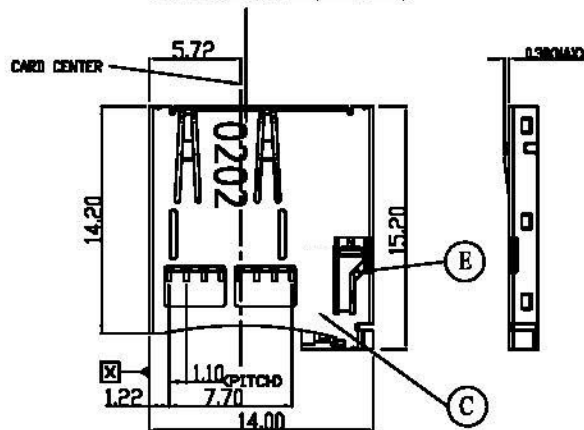

SPECIFICATION:

- ELECTRICAL
 - Current Rating: 0.5A per pin
 - Voltage Rating: 100V AC/DC
 - Contact Resistance: 50mΩ
 - Insulation Resistance: 1000MΩ
 - Dielectric Withstanding Voltage: 500VAC
- MECHANICAL
 - Durability: 10000 Cycle
 - Insertion Force: 9.8N max.
 - Extraction Force: 9.8N max.
- ENVIRONMENTAL
 - Operating temperature range: -40°C~+90°C
 - Storage temperature range: -40°C~+90°C
- SOLDER ABILITY
 - Recommended IR Reflow Temperature: 260°C
 - Recommended PCB Thickness: 1.0mm

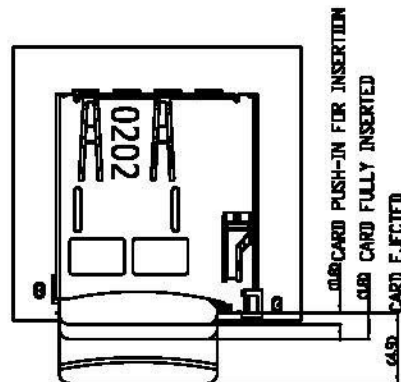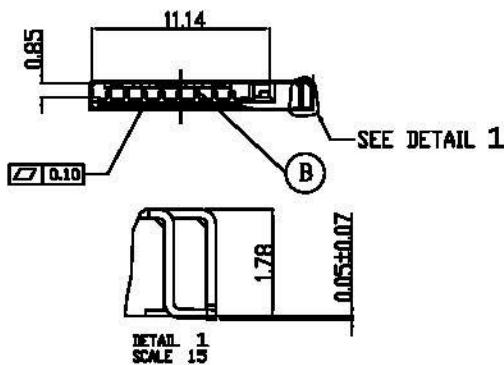

DAT2	CD/DAT3	CMD	VDD	CLK	VSS	DAT0	DAT1	DETECTION	GND
P1	P2	P3	P4	P5	P6	P7	P8	S	G

PIN ASSIGNMENT

112A-TAAR-R03	Top Mount, Push-Push Type, Contact Area: 10u" Gold Plating
PRODUCT NO.	DESCRIPTION

UNLESS OTHERWISE SPECIFIED TOLERANCE		
ANGLES	ANG.	+5P
LINEAR	0.	±0.3
	0.0	±0.25
	0.00	±0.20
SCALE	AS SHOWN	UNIT: mm
DRAWN	Willis	2013/10/31
CHECKED	Angel	2013/10/31
APPROVED	Ken	2013/10/31

All Connectors

www.allconnectors.de
Tel: +49 714 206338
70734 Filzschade - Germany
info@allconnectors.de
Fax: +49 714 206301
Bitterweh, Z.

DRAWN NAME:
Micro SD Socket Top Mount, Push-Push Type

PRODUCT NO. 112A-TAAR-R03

REV.	DESCRIPTION	DATE	REV.	DESCRIPTION	DATE	SIZE A4	REV. 1.0	FILE NAME	112A-TAAR-R03_B_1
------	-------------	------	------	-------------	------	---------	----------	-----------	-------------------