


1. DAT1	MIDDLE	7. NC	MIDDLE
2. DAT0	MIDDLE	8. VSS	LONG
3. VSS	MIDDLE	9. CMD	MIDDLE
4. CLK	MIDDLE	10. CD/DAT3	SHORT
5. VDD	LONG	11. DAT2	MIDDLE
6. NC	MIDDLE		

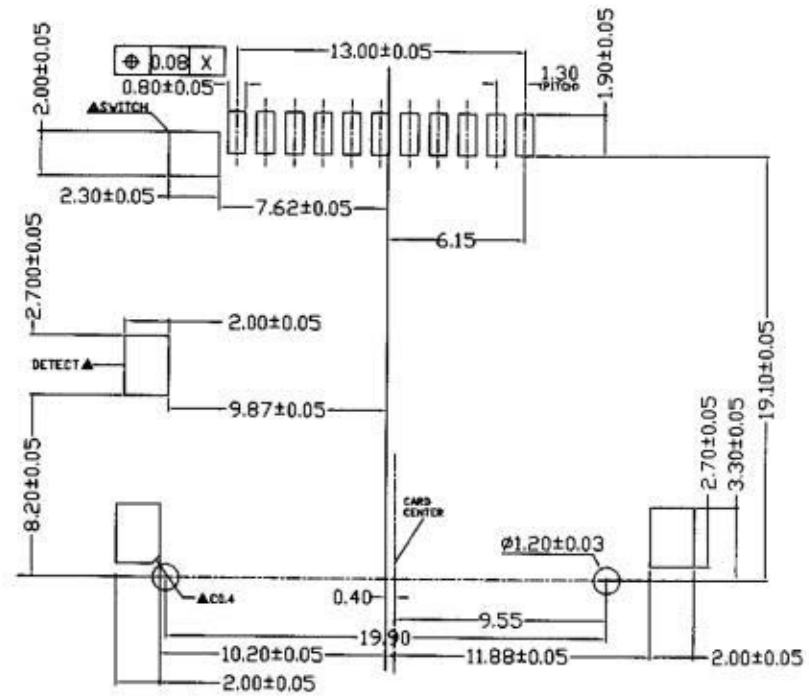

P.C.B layout

NOTES:  
MATERIAL  
HOUSING:HIGH TEMPERATURE THERMOPLASTIC  
CONTACT:COOPER ALLOY  
SHELL:COOPER ALLOY  
PLATING  
CONTACT AREA:GOLD PLATED OVER NI  
SOLDER TAIL:100u" MIN Sn/Pb PLATED OVER NI  
SHELL SOLDER AREA:GOLD PLATED OVER NI  
PATING  
CURRENT RATING:0.5A  
VOLTAGE RATING:250VRMS  
OPERATING  
TEMPERATURE:-25C--+90C  
SPECIFICATION  
CONTACT RESISTANCE:40 MILLIOHMS  
DIELECTRIC WITHSTANDING VOLTAGE:500VAC MEGOHMS  
INSULATION RESISTANCE:100 MEGOHMS

MSDC-W19PA-11-LF  
LEADFREE  
RoHS Compliant



PART NO. MSDC-W19PA-11

DWG NO. MSDC-W19PA-11

CHECKED BY CY

TOLERANCES ARE

DESCRIPTION:

FILE NO.

DRAWING BY

PROJECTION

X±0.2  
XX±0.1  
XXX±  
AWG

AREA REVISIONS HK DATE

UNIT / mm

SCALE 1:1

PROJECTION

XXX±  
AWG

AREA REVISIONS HK DATE