MATERIAL
Insulator: Thermal Plastic UL94V-0
Contacts: Copper Alloy
Shell: Stainless Steel
CONTACT PLATING
Underplate: 50u"~100U" Nickel
Contact Area: 1u" Selective Gold
Solder Tails Area: 100u"~160u" Tin(Lead Free)
ELECTRICAL
Operation Voltage: 3.3V
Current Rating: 0.5 A.
Contact Resistance: 100 ohms Max.
Insulation Resistance: 1000 Mohms Min. @ 500 VDC
Dielectric Withstanding Voltage: 500 VAC / Minute
Operating Temperature: -25°C To +90°C
Mating Cycles: 10,000 Cycles,Spring Is not Breaking

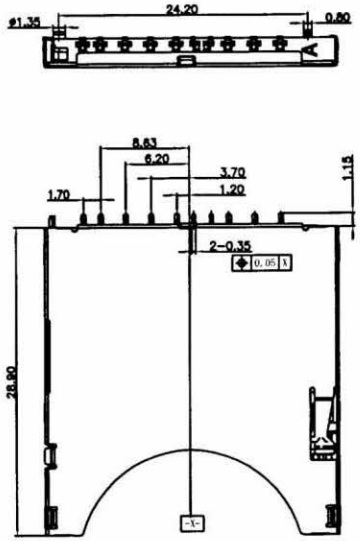

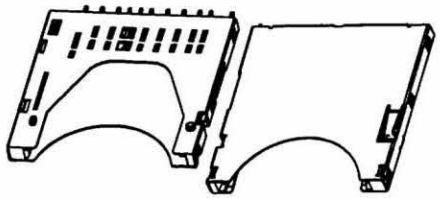

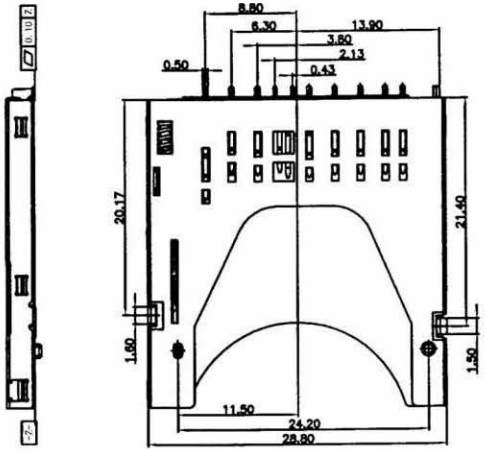



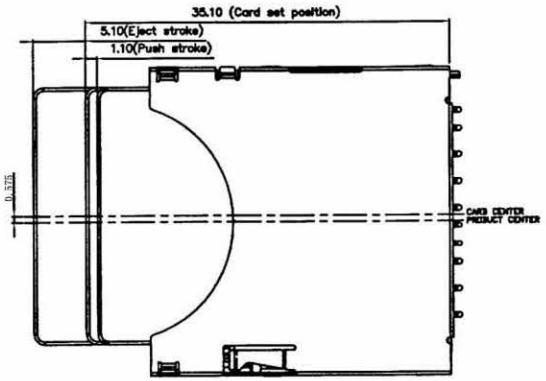

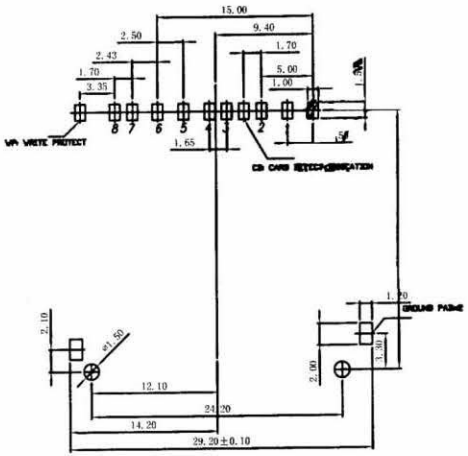

CIRCUIT:		
WP GROUND	WP GROUND	WP GROUND
CD #3	CD #3	CD #3
WITHOUT CARD	CARD INSERTED WRITE PROTECT : LOCK	CARD INSERTED WRITE PROTECT : UNLOCK

RoHS Compliant

All Connectors
www.allconnectors.de
info@allconnectors.de
Tel.: 0049 711 7003503
Fax: 0049 711 7003504
70794 Filderstadt-Germany
Kettemerstr. 23

DRAWING BY CY		TOLERANCES ARE
CHECKED BY GENIUS		X. ±
UNIT / mm	SCALE 1 : 1	.X ±
		.XX ±
		.XXX ±
DATE		ANG ±
SIZE A4	PPOJECTION	



ORDER INFORMATION

SDC-W24PB02-09-LF

SERIES
90°SMT
PUSH PUSH
POST TO POST 24.2mm
B TYPE
PAD 0+2
09WAY
LEADFREE

DESCRIPTION: