

REV.	Description	Date

Specification of connector

General Characteristics


- Locking system : screw M12
- Termination : solder
- Shell protection : IP68
- Contact resistance : $\leq 10\text{m}\Omega$
- Insulation resistance : $\geq 10\text{M}\Omega$

Materials

- Socket contact : brass
- Contact plating : gold
- Female insert : PA
- Ring nut : chromium plated
- O-ring : rubber

Specification of cable

Material Jacket	PVC	PUR

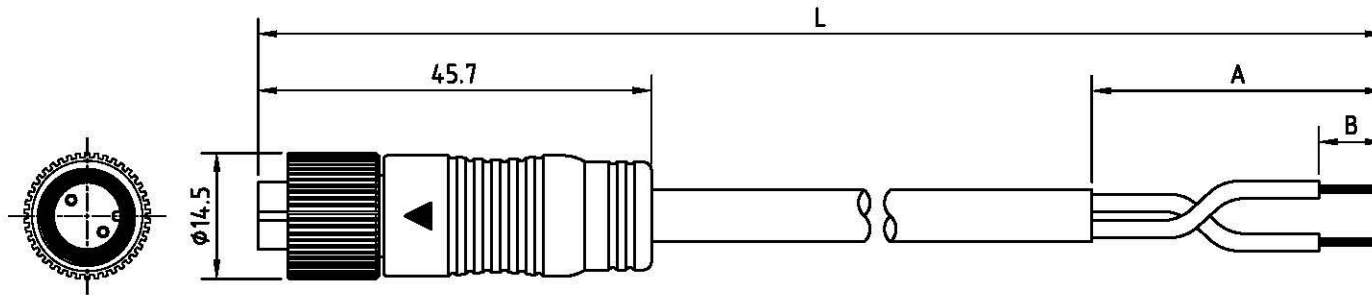

RoHS
UL-Recognized file No.E359387

CONTACT ARRANGEMENT FRONT VIEW (FEMALE)	2P	3P	4P	5P
Rated voltage	250V			
Rated current	5A			

Allconnectors
 www.allconnectors.de
 Tel.: 0049 711 7009503
 70794 Filderstadt - Germany

info@allconnectors.de
 Fax: 0049 711 7009504
 Kettnerstr. 25

DATE	2016/10/7	PART NO.	D170F3S-UC-XP
DWN	GINA	REV.	0
CHK			
UNIT	MM		

ITEM	Sensor Connector M12
------	----------------------