


REV.	Description	Date

Specification of connector

General Characteristics

- Locking system : screw M12
- Termination : solder
- Shell protection : IP68
- Contact resistance : $\leq 10\text{m}\Omega$
- Insulation resistance : $\geq 10\text{M}\Omega$

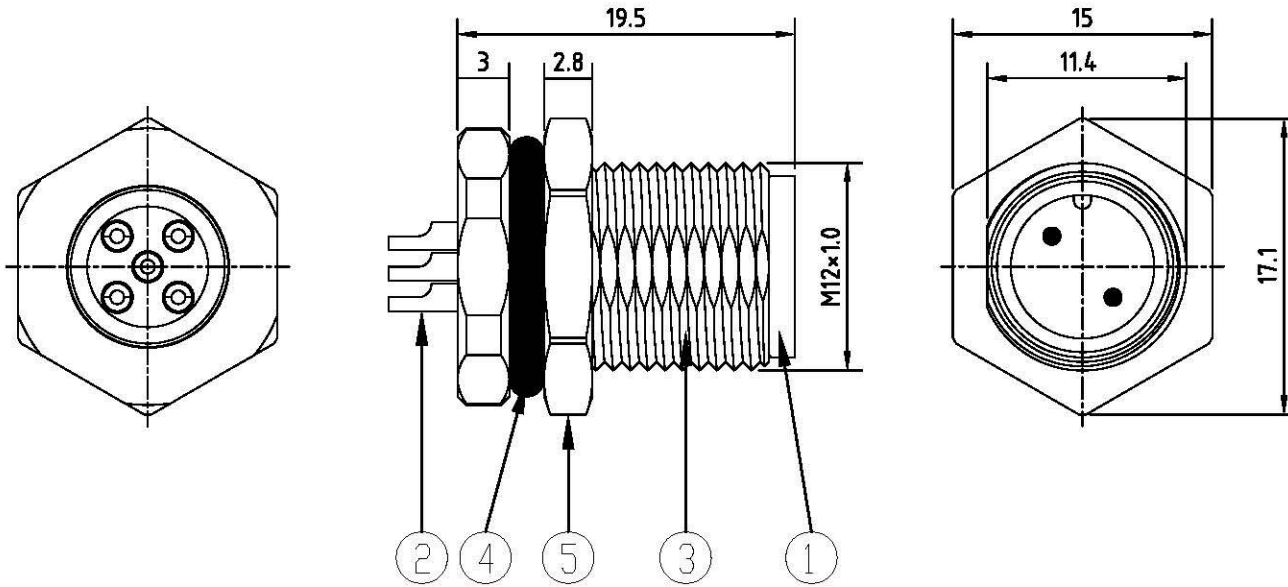

RoHS
TOLERANCE X \pm 0.5 .X \pm 0.3
UL-Recognized file No.E359387

CONTACT ARRANGEMENT FRONT VIEW (MALE)	2P	3P	4P	5P
Rated voltage	250V			
Rated current	5A			

5	Nut	Brass	Nickel plated
4	O ring	Rubber	
3	Body	Brass	Nickel plated
2	Pin	Brass	Gold plated
1	Housing	PA	UL94V-0
Item	Description	Material	Treat & Remark

Allconnectors

www.allconnectors.de
Tel.: 0049 711 7009503
70794 Filderstadt - Germany

info@allconnectors.de
Fax: 0049 711 7009504
Kettnerstr. 25

DATE	2016/10/7	PART NO.	SD170F8-UC-XP
DWN	GINA	REV.	0
CHK			
UNIT	MM		

ITEM	Sensor Connector M12
------	----------------------