


REV.	Description	Date

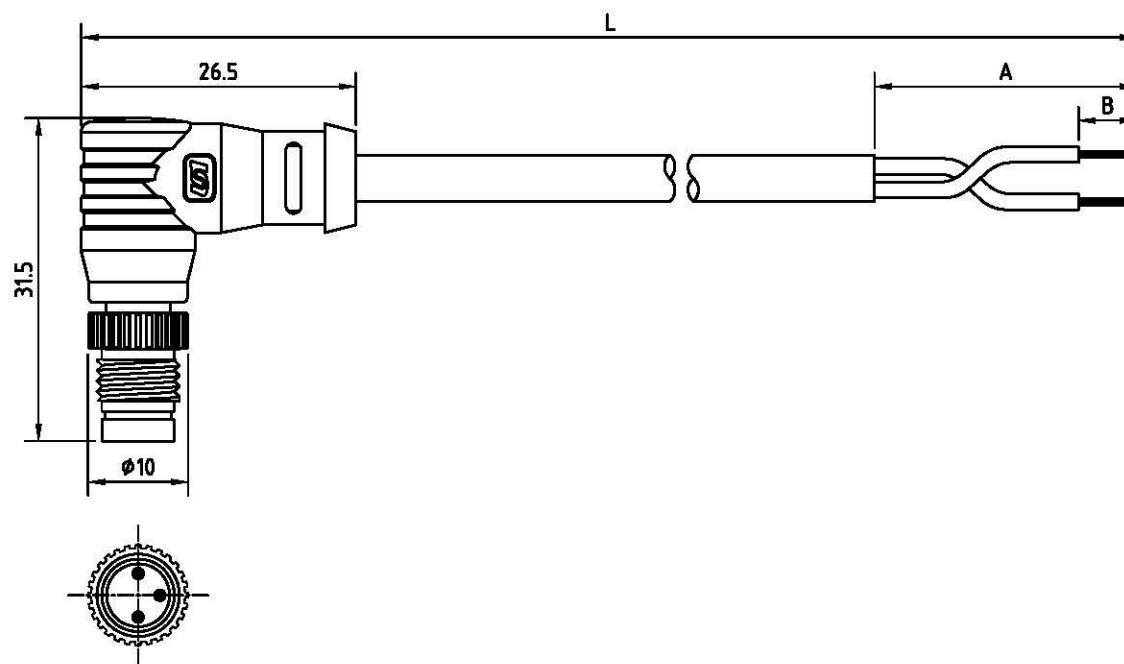

Specification of connector

General Characteristics

Locking system	: screw M8
Termination	: solder
Shell protection	: IP68
Contact resistance	: $\leq 10\text{m}\Omega$
Insulation resistance	: $\geq 10\text{M}\Omega$

Materials

Pin contact	: brass
Contact plating	: gold
Male insert	: PA
Ring nut	: chromium plated

Specification of cable

Material Jacket	PVC	PUR

RoHS
UL-Recognized file No.E359387

CONTACT ARRANGEMENT FRONT VIEW (MALE)		
	3P	4P
Rated voltage	125V	
Rated current	5A	

Allconnectors

www.allconnectors.de
Tel.: 0049 711 7009503
70794 Filderstadt - Germany

info@allconnectors.de
Fax: 0049 711 7009504
Kettnerstr. 25

DATE	2019/11/11	PART NO.	UT-D251M1-UL-XP
DWN	GINA	REV.	0
CHK			
UNIT	MM		

ITEM	Sensor Connector M8
------	---------------------