

**NOTE:**

**1.MATERIAL:**




- 1.1 HOUSING: HIGH THERMOPLASTIC ,UL 94V-0 COLOR: BLACK.
- 1.2 CONTACT: 5191R-H,T=0.15±0.01;
- 1.3 SHELL: C2680R-H,T=0.15±0.01;

**2.FINISH: 2.1 CONTACT: GOLD OVER NICKEL**

- 2.2 SHELL: NICKEL OVER ALL OVER,  
G/F OVER SOLDER AREA;

**3.RATING: OPERATING VOLTAGE: 30V**

- CURRENT RATING: 0.5A
- OPERATING TEMPERATURE: -20°C~+85°C

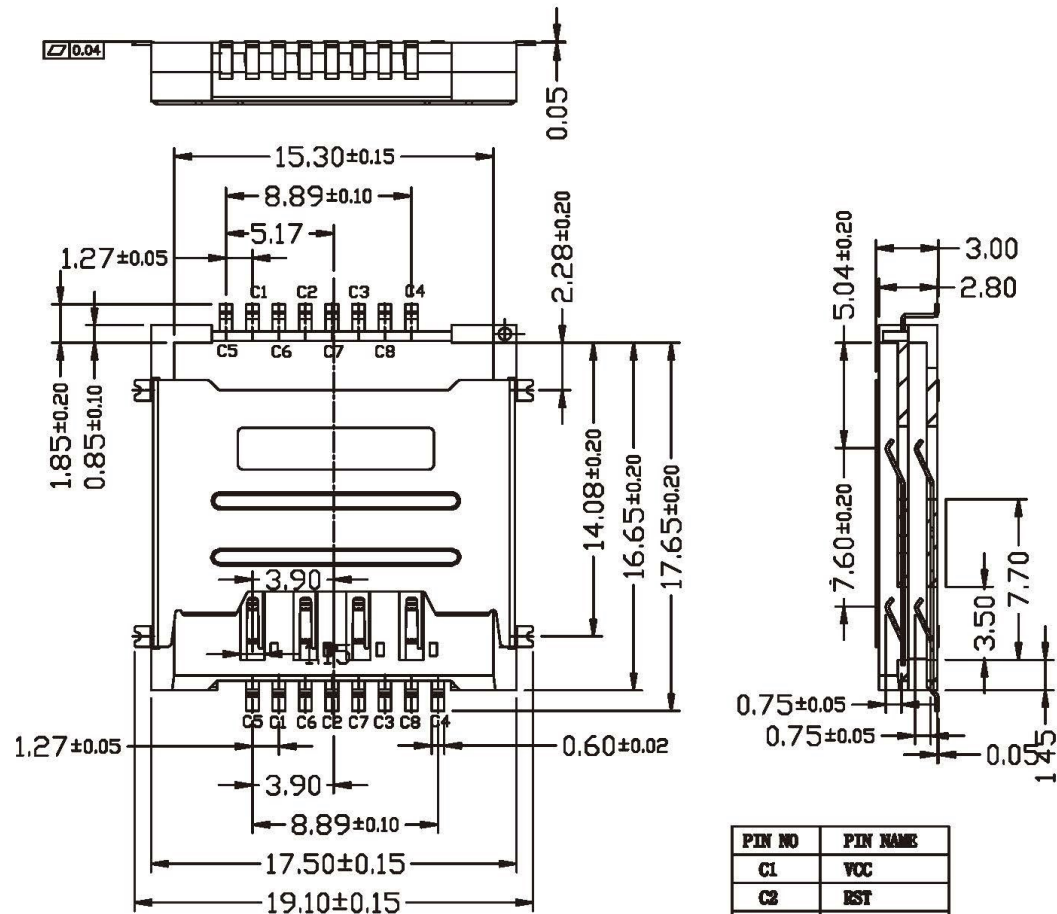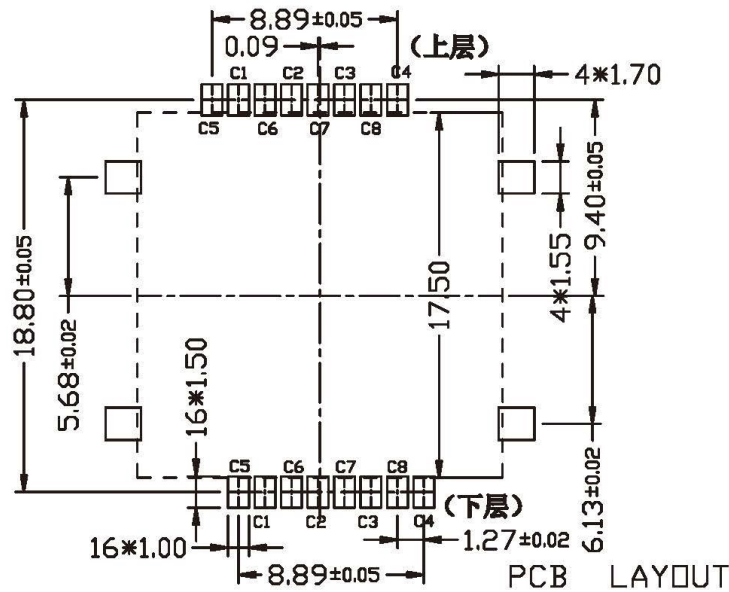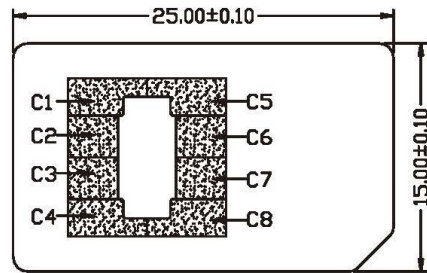

PIN NO	PIN NAME
C1	VCC
C2	BST
C3	CLK
C4	Reserved
C5	GND
C6	VFP
C7	I/O
C8	Reserved

**All connectors**

www.allconnectors.de info@allconnectors.de  
Tel.: 0049 711 7009503 Fax: 0049 711 7009504  
70794 Filderstadt - Germany Kettenerstr. 25


**RoHS Compliant**

DRAWING BY CY  
CHECKED BY GENIUS  
UNIT/mm SCALE 1:1  
DATE  
SIZE A4


TOLERANCES ARE

X ±  
X ± 0.10  
.XX ± 0.05  
.XXX ±  
ANG ±

P PROJECTION



**ORDER INFORMATION**

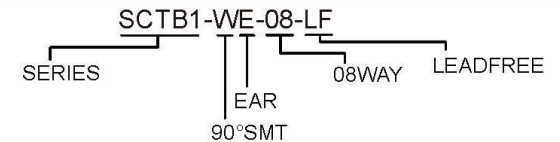

DESCRIPTION: